


2. SPECIFICATIONS

1) 1.80 m (5' 11") MONO BOOM, 0.96 m (3' 2") ARM, WITH BOOM SWING POST

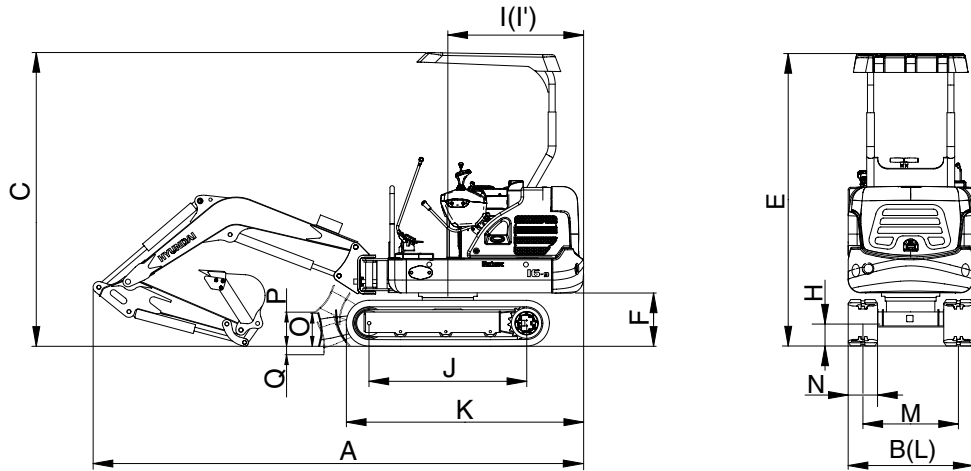

1692SP02

Description		Unit	Specification
Operating weight (canopy)		kg (lb)	1650 (3640)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	0.04 (0.05)
Overall length	A	mm (ft-in)	3840 (12' 7")
Overall width, with 230 mm shoe (extension crawler)	B		980~1250 (3' 3" ~ 4' 1")
Overall height	C		2300 (7' 7")
Overall height of canopy	E		2300 (7' 7")
Ground clearance of counterweight	F		415 (1' 4")
Minimum ground clearance	H		150 (0' 6")
Rear-end distance	I		1065 (3' 6")
Rear-end swing radius	I'		1065 (3' 6")
Distance between tumbler	J		1230 (4' 0")
Undercarriage length	K		1590 (5' 3")
Undercarriage width (extension crawler)	L		980~1250 (3' 3" ~ 4' 1")
Track gauge (extension crawler)	M		750~1020 (2' 6" ~ 3' 4")
Track shoe width, standard	N		230 (9")
Height of blade	O		250 (0' 10")
Ground clearance of blade up	P		170 (0' 7")
Depth of blade down	Q		240 (0' 9")
Travel speed (low/high)			km/hr (mph)
Swing speed		rpm	9.3
Gradeability		Degree (%)	30 (58)
Ground pressure 230 mm rubber shoe (canopy)		kgf/cm ² (psi)	0.27 (3.84)
Max traction force		kg (lb)	1550 (3420)