


2. SPECIFICATIONS


1) 5.1 m (16' 9") ONE PIECE BOOM, 2.2 m (7' 3") ARM AND REAR DOZER BLADE

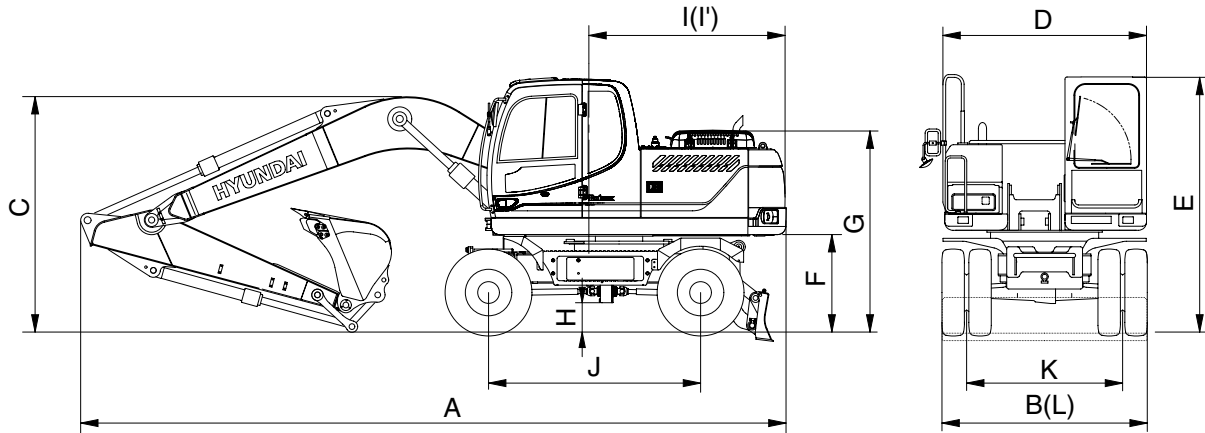

17W92SP02

Description		Unit	Specification
Operating weight		kg (lb)	17300 (38140)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	0.76 (0.99)
Overall length	A	mm (ft-in)	8650 (28' 5")
Overall width	B		2500 (8' 2")
Overall height	C		3610 (11' 10")
Upperstructure width	D		2475 (8' 1")
Cab height	E		3190 (10' 6")
Ground clearance of counterweight	F		1270 (4' 2")
Engine cover height	G		2520 (8' 3")
Minimum ground clearance	H		375 (1' 3")
Rear-end distance	I		2480 (8' 2")
Rear-end swing radius	I'		2480 (8' 2")
Wheel base	J		2600 (8' 6")
Tread	K		1914 (6' 3")
Dozer blade width	L		2500 (8' 2")
Travel speed	Low		km/hr (mph)
	High	37 (23.0)	
	Creep	3.0 (1.9)	
Swing speed		rpm	11.0
Gradeability		Degree (%)	35 (70)
Max traction force		kgf (lbf)	9440 (20810)

2) 5.1 m (16' 9") HYDRAULIC ADJUSTABLE BOOM, 2.6 m (8' 6") ARM AND REAR DOZER BLADE

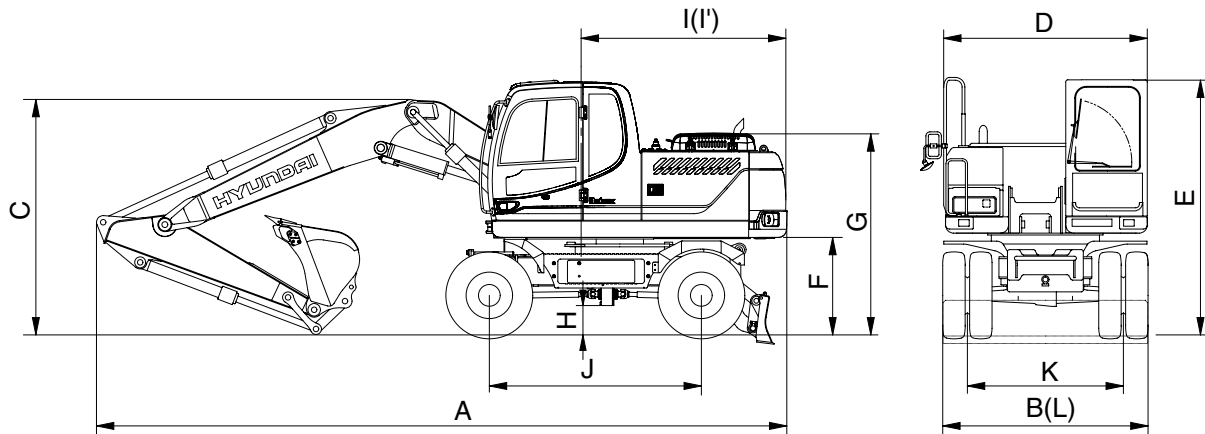

17W92SP03

Description		Unit	Specification
Operating weight		kg (lb)	16870 (37190)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	0.76 (0.99)
Overall length	A	mm (ft-in)	8750 (28' 8")
Overall width	B		2500 (8' 2")
Overall height	C		2920 (9' 7")
Upperstructure width	D		2475 (8' 1")
Cab height	E		3190 (10' 6")
Ground clearance of counterweight	F		1270 (4' 2")
Engine cover height	G		2520 (8' 3")
Minimum ground clearance	H		375 (1' 3")
Rear-end distance	I		2480 (8' 2")
Rear-end swing radius	I'		2480 (8' 2")
Wheel base	J		2600 (8' 6")
Tread	K		1914 (6' 3")
Dozer blade width	L		2500 (8' 2")
Travel speed	Low		km/hr (mph)
	High	37 (23.0)	
	Creep	3.0 (1.9)	
Swing speed		rpm	11.0
Gradeability		Degree (%)	35 (70)
Max traction force		kgf (lbf)	9440 (20810)