


## 2. SPECIFICATIONS

### 1) R210LC-9

- 5.68 m (18' 8") BOOM and 2.92 m (9' 7") ARM

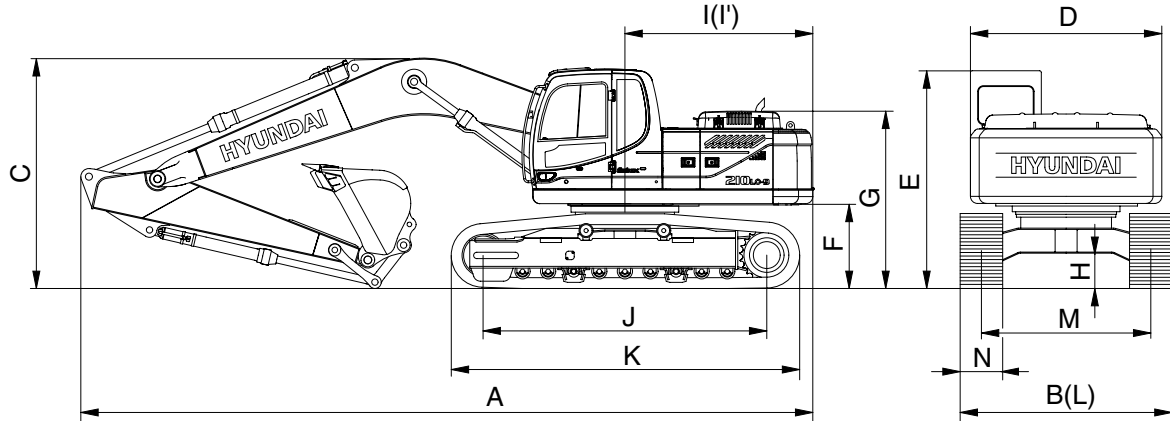


21092SP02

Description		Unit	Specification
Operating weight		kg (lb)	21900 (48280)
Bucket capacity (SAE heaped), standard		m <sup>3</sup> (yd <sup>3</sup> )	0.92 (1.20)
Overall length	A	mm (ft-in)	9530 (31' 3")
Overall width, with 600mm shoe	B		2990 ( 9' 10")
Overall height	C		3030 ( 9' 11")
Superstructure width	D		2740 ( 9' 0")
Overall height of cab	E		2920 ( 9' 7")
Ground clearance of counterweight	F		1060 ( 3' 6")
Engine cover height	G		2320 ( 7' 7")
Minimum ground clearance	H		480 ( 1' 7")
Rear-end distance	I		2770 ( 9' 1")
Rear-end swing radius	I'		2840 ( 9' 4")
Distance between tumblers	J		3650 (12' 0")
Undercarriage length	K		4440 (14' 7")
Undercarriage width	L		2990 ( 9' 10")
Track gauge	M		2390 ( 7' 10")
Track shoe width, standard	N		600 (24")
Travel speed (low/high)			km/hr (mph)
Swing speed		rpm	12.0
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm <sup>2</sup> (psi)	0.46 (6.54)
Max traction force		kg (lb)	21100 (46500)

## 2) R210LC-9 LONG REACH

- 8.2 m (26' 11") BOOM and 6.3 m (20' 8") ARM

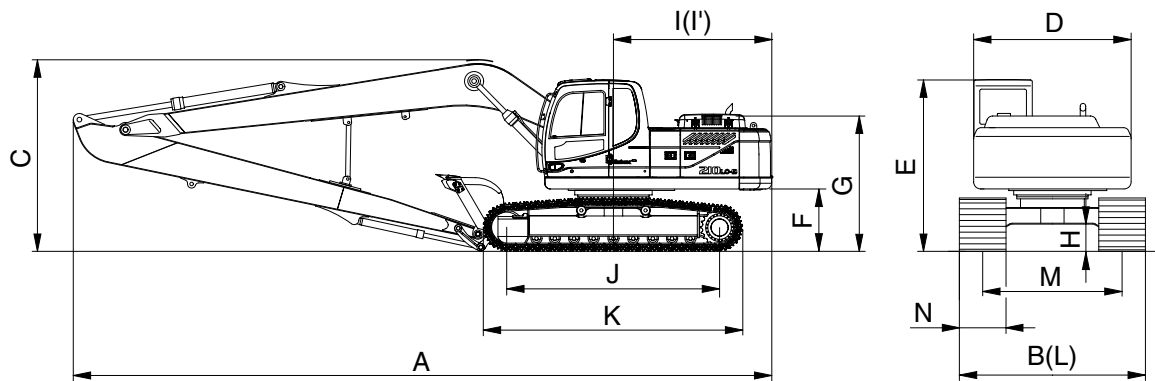


21092SP06

Description		Unit	Specification
Operating weight		kg (lb)	24360 (53700)
Bucket capacity (SAE heaped), standard		m <sup>3</sup> (yd <sup>3</sup> )	0.51 (0.67)
Overall length	A	mm (ft-in)	12030 (39' 6")
Overall width, with 800 mm shoe	B		3190 (10' 6")
Overall height	C		3280 (10' 9")
Superstructure width	D		2740 ( 9' 0")
Overall height of cab	E		2920 ( 9' 7")
Ground clearance of counterweight	F		1060 ( 3' 6")
Engine cover height	G		2320 ( 7' 7")
Minimum ground clearance	H		480 ( 1' 7")
Rear-end distance	I		2770 ( 9' 1")
Rear-end swing radius	I'		2840 ( 9' 4")
Distance between tumbler	J		3650 (12' 0")
Undercarriage length	K		4440 (14' 7")
Undercarriage width	L		3190 (10' 6")
Track gauge	M		2390 ( 7' 10")
Track shoe width, standard	N		800 (32")
Travel speed (low/high)			km/hr (mph)
Swing speed		rpm	12.0
Gradeability		Degree (%)	35 (70)
Ground pressure (800 mm shoe)		kgf/cm <sup>2</sup> (psi)	0.42 (5.97)
Max traction force		kg (lb)	21100 (46500)

### 3) R210LC-9 HIGH WALKER

- 5.68 m (18' 8") BOOM and 2.92 m (9' 7") ARM

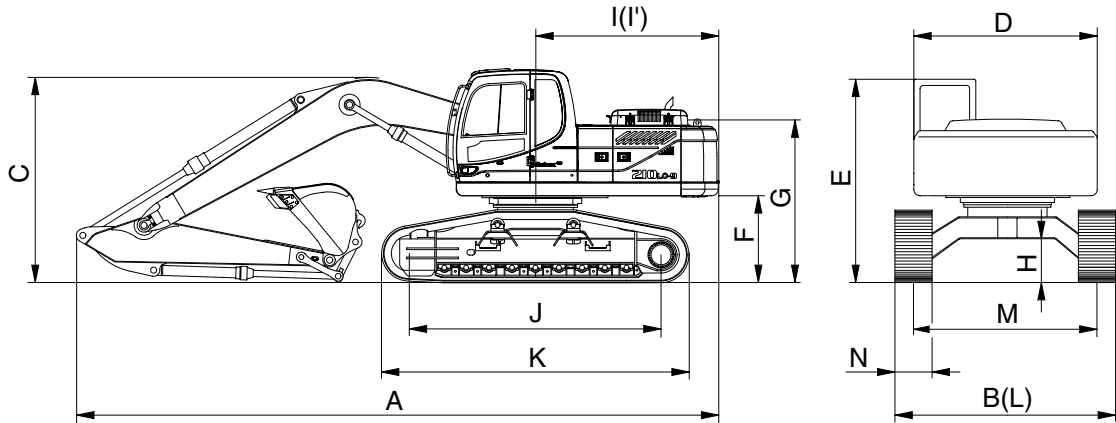

21092SP07

Description		Unit	Specification
Operating weight		kg (lb)	23160 (51060)
Bucket capacity (SAE heaped), standard		m <sup>3</sup> (yd <sup>3</sup> )	0.92 (1.20)
Overall length	A	mm (ft-in)	9470 (31' 1")
Overall width, with 600 mm shoe	B		3395 (11' 2")
Overall height	C		3060 (10' 0")
Superstructure width	D		2740 (9' 0")
Overall height of cab	E		3100 (10' 2")
Ground clearance of counterweight	F		1240 (4' 1")
Engine cover height	G		2500 (8' 2")
Minimum ground clearance	H		660 (2' 2")
Rear-end distance	I		2770 (9' 1")
Rear-end swing radius	I'		2840 (9' 4")
Distance between tumblers	J		3650 (12' 0")
Undercarriage length	K		4440 (14' 7")
Undercarriage width	L		3395 (11' 2")
Track gauge	M		2795 (9' 2")
Track shoe width, standard	N		600 (24")
Travel speed (low/high)			km/hr (mph)
Swing speed		rpm	12.0
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm <sup>2</sup> (psi)	0.49 (6.97)
Max traction force		kg (lb)	21100 (46500)