


2. SPECIFICATIONS


1) 5.68m(18' 8") MONO BOOM

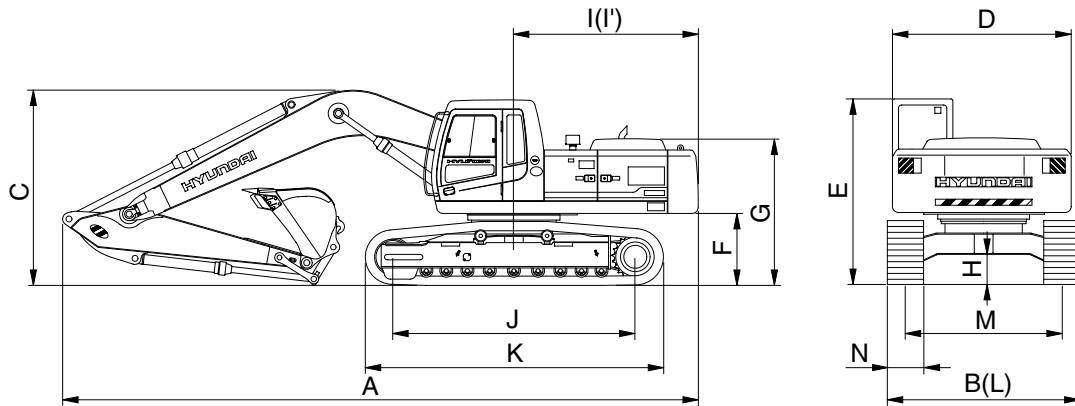

21072SP02

Description		Unit	Specification
Operating weight		kg(lb)	22000(48500)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	0.87(1.14)
Overall length	A	mm(ft-in)	9540(31' 4")
Overall width, with 500mm shoe	B		2500(8' 2")
Overall height	C		3070(10' 1")
Superstructure width	D		2530(8' 4")
Overall height of cab	E		2920(9' 7")
Ground clearance of counterweight	F		1060(3' 6")
Engine cover height	G		2320(7' 7")
Minimum ground clearance	H		480(1' 7")
Rear-end distance	I		2770(9' 1")
Rear-end swing radius	I'		2800(9' 2")
Distance between tumblers	J		3650(12' 0")
Undercarriage length	K		4440(14' 7")
Undercarriage width	L		2500(8' 2")
Track gauge	M		2000(6' 7")
Track shoe width, standard	N		500(20")
Travel speed(Low/high)			km/hr(mph)
Swing speed		rpm	12.5
Gradeability		Degree(%)	35(70)
Ground pressure(500mm shoe)		kgf/cm ² (psi)	0.56(7.96)

2) 5.50m(18' 1") TWO PIECE BOOM

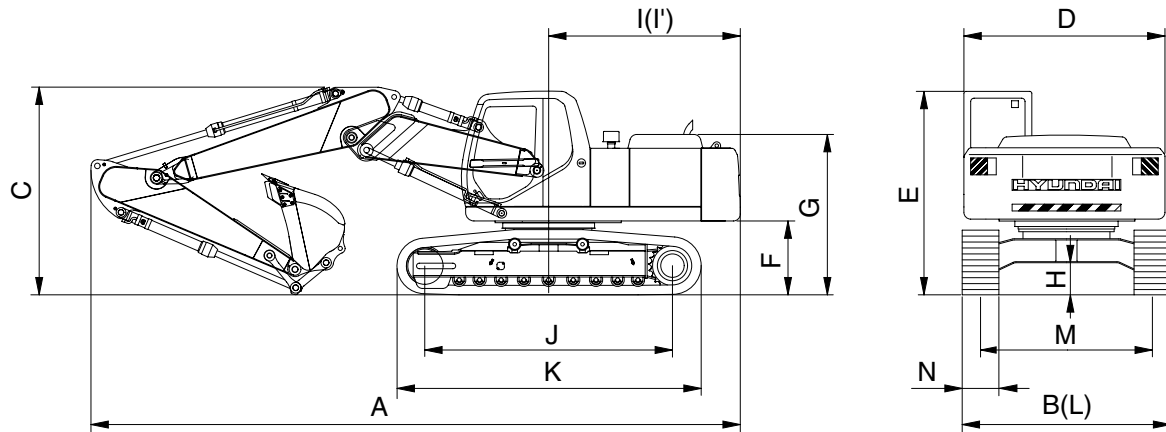

210N72SP06

Description		Unit	Specification
Operating weight		kg(lb)	21150(46630)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	0.87(1.14)
Overall length	A	mm(ft-in)	9390(30' 10")
Overall width, with 500mm shoe	B		2500(8' 2")
Overall height	C		3110(10' 2")
Superstructure width	D		2530(8' 4")
Overall height of cab	E		2920(9' 7")
Ground clearance of counterweight	F		1060(3' 6")
Engine cover height	G		2320(7' 7")
Minimum ground clearance	H		480(1' 7")
Rear-end distance	I		2770(9' 1")
Rear-end swing radius	I'		2800(9' 2")
Distance between tumbler centers	J		3650(12' 0")
Undercarriage length	K		4440(14' 7")
Undercarriage width	L		2500(8' 2")
Track gauge	M		2000(6' 7")
Track shoe width, standard	N		500(20")
Travel speed(Low/high)		km/hr(mph)	3.4/5.3(2.1/3.3)
Swing speed		rpm	12.5
Gradeability		Degree(%)	35(70)
Ground pressure(500mm shoe)		kgf/cm ² (psi)	0.56(7.96)