


2. DIMENSION AND WEIGHT

1) R250LC-9

(1) Base machine

Mark	Description	Unit	Specification
L	Length	mm (ft-in)	5190 (17' 0")
H	Height	mm (ft-in)	2990 (9' 10")
W	Width	mm (ft-in)	3180 (10' 5")
Wt	Weight	kg (lb)	19550 (43100)

※ With 600 mm (24") triple grouser shoes and 4600 kg (10140 lb) counterweight.

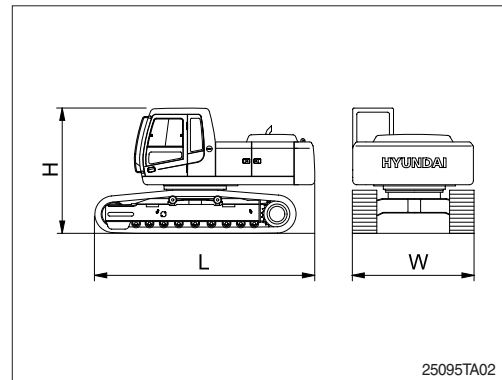


25095TA02

(2) Boom assembly

Mark	Description	Unit	Specification
L	Length	mm (ft-in)	6060 (19' 11")
H	Height	mm (ft-in)	1630 (5' 4")
W	Width	mm (ft-in)	770 (2' 6")
Wt	Weight	kg (lb)	2460 (5420)

※ 5.85 m (19' 2") boom with arm cylinder (included piping and pins).

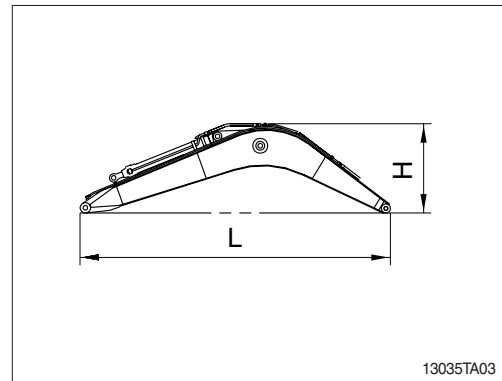


13035TA03

(3) Arm assembly

Mark	Description	Unit	Specification
L	Length	mm (ft-in)	4120 (13' 6")
H	Height	mm (ft-in)	910 (2' 12")
W	Width	mm (ft-in)	400 (1' 4")
Wt	Weight	kg (lb)	1595 (3520)

※ 3.05 m (10' 0") arm with bucket cylinder (included linkage and pins).

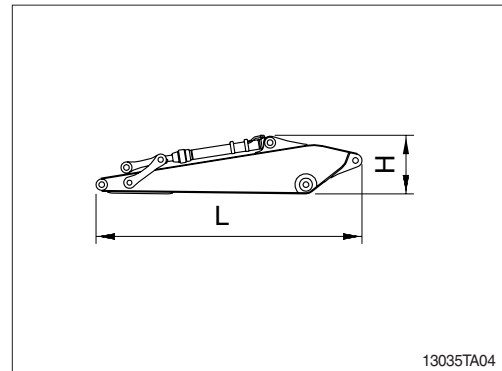


13035TA04

(4) Bucket assembly

Mark	Description	Unit	Specification
L	Length	mm (ft-in)	1780 (5' 10")
H	Height	mm (ft-in)	1070 (3' 6")
W	Width	mm (ft-in)	1250 (4' 1")
Wt	Weight	kg (lb)	910 (2000)

※ 1.08 m³ (1.41 yd³) SAE heaped bucket (included tooth and side cutters).

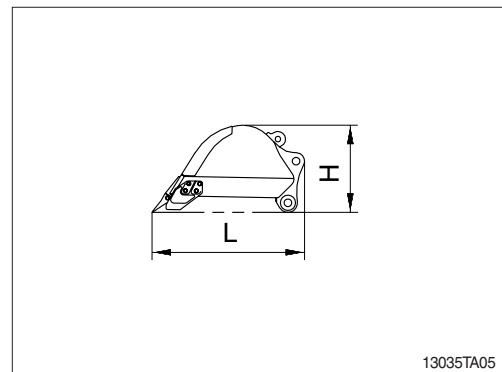


13035TA05

(5) Boom cylinder


Mark	Description	Unit	Specification
L	Length	mm (ft-in)	2100 (6' 11")
H	Height	mm (ft-in)	230 (0' 9")
W	Width	mm (ft-in)	330 (1' 1")
Wt	Weight	kg (lb)	380 (840)

※ Included piping.

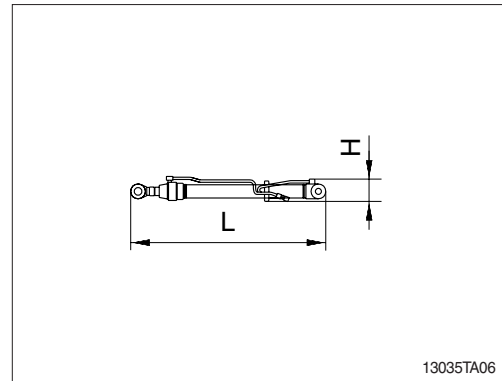


(6) Cab assembly

Mark	Description	Unit	Specification
L	Length	mm (ft-in)	1962 (6' 4")
H	Height	mm (ft-in)	1676 (5' 5")
W	Width	mm (ft-in)	1288 (4' 2")
Wt	Weight	kg (lb)	310 (680)

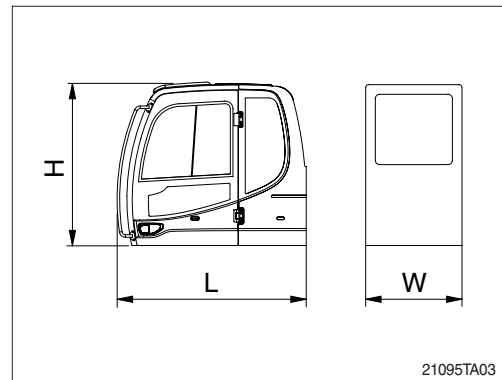

(7) Counterweight

Mark	Description	Unit	Specification
L	Length	mm (ft-in)	2840 (9' 4")
H	Height	mm (ft-in)	1050 (3' 5")
W	Width	mm (ft-in)	530 (1' 9")
Wt	Weight	kg (lb)	4600 (10140)

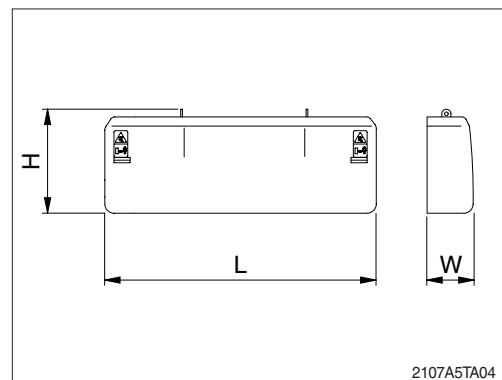


2) R250NLC-9

(1) Base machine

Mark	Description	Unit	Specification
L	Length	mm (ft-in)	5190 (17' 0")
H	Height	mm (ft-in)	2990 (9' 10")
W	Width	mm (ft-in)	2980 (9' 9")
Wt	Weight	kg (lb)	19450 (42880)

※ With 600 mm (24") triple grouser shoes and 4600 kg (10140 lb) counterweight.

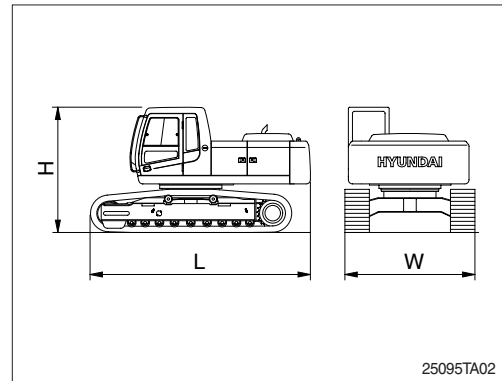

3) R250LC-9 HIGH WALKER

(1) Base machine

Mark	Description	Unit	Specification
L	Length	mm (ft-in)	5190 (17' 0")
H	Height	mm (ft-in)	3345 (11' 0")
W	Width	mm (ft-in)	3390 (11' 1")
Wt	Weight	kg (lb)	21800 (48100)

※ With 600 mm (24") triple grouser shoes and 4600 kg (10140 lb) counterweight.

