


2. SPECIFICATIONS

1) 2.03 m (6' 8") MONO BOOM, 1.12 m (3' 8") ARM, WITH BOOM SWING POST

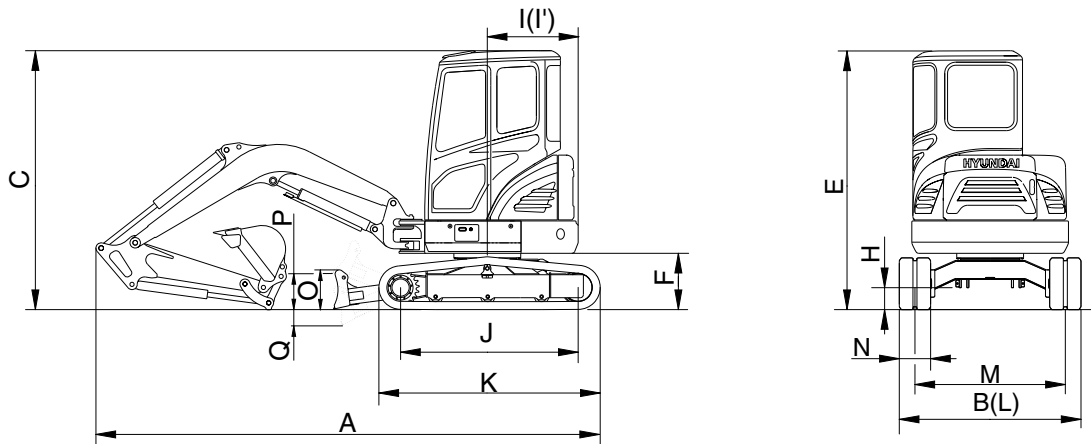

R27Z92SP02

Description		Unit	Specification
Operating weight (cabin / canopy)		kg (lb)	2880 (6350) / 2730 (6020)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	0.08 (0.10)
Overall length	A	mm (ft-in)	4180 (13' 9")
Overall width, with 300 mm shoe	B		1550 (5' 1")
Overall height	C		2500 (8' 2")
Overall height of cab	E		2500 (8' 2")
Ground clearance of counterweight	F		540 (1' 9")
Minimum ground clearance	H		290 (0' 11")
Rear-end distance	I		775 (2' 7")
Rear-end swing radius	I'		775 (2' 7")
Distance between tumbler	J		1550 (5' 1")
Undercarriage length	K		1970 (6' 6")
Undercarriage width	L		1550 (5' 1")
Track gauge	M		1250 (4' 1")
Track shoe width, standard	N		300 (12")
Height of blade	O		300 (1' 0")
Ground clearance of blade up	P		370 (1' 3")
Depth of blade down	Q		450 (1' 6")
Travel speed (low/high)		km/hr (mph)	2.4/4.4 (1.5/2.7)
Swing speed		rpm	9.0
Gradeability		Degree (%)	30 (58)
Ground pressure 300 mm rubber shoe (cab / canopy)		kgf/cm ² (psi)	0.29 (4.12) / 0.27 (3.84)