


2. SPECIFICATIONS

1) R320LC-9

· 6.45 m (21' 2") BOOM and 3.20 m (10' 6") ARM

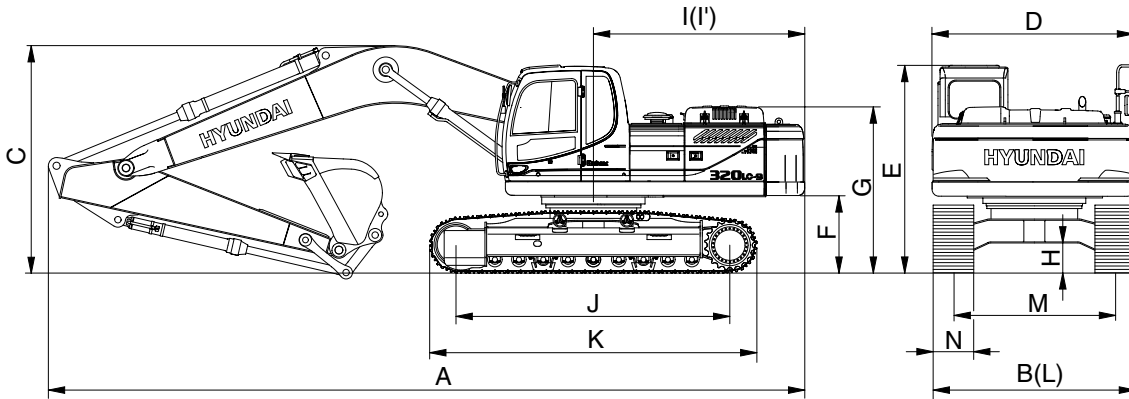


32092SP02

Description		Unit	Specification
Operating weight		kg (lb)	32200 (70990)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	1.44 (1.88)
Overall length	A	mm (ft-in)	10980 (36' 0")
Overall width, with 600 mm shoe	B		3280 (10' 9")
Overall height	C		3380 (11' 1")
Superstructure width	D		2980 (9' 9")
Overall height of cab	E		3090 (10' 2")
Ground clearance of counterweight	F		1200 (3' 11")
Engine cover height	G		2580 (8' 6")
Minimum ground clearance	H		500 (1' 8")
Rear-end distance	I		3265 (10' 9")
Rear-end swing radius	I'		3330 (10' 11")
Distance between tumblers	J		4030 (13' 3")
Undercarriage length	K		4940 (16' 2")
Undercarriage width	L		3280 (10' 9")
Track gauge	M		2680 (8' 10")
Track shoe width, standard	N		600 (24")
Travel speed (low/high)		km/hr (mph)	3.3/5.5 (2.1/3.4)
Swing speed		rpm	9.2
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm ² (psi)	0.62 (8.82)
Max traction force		kg (lb)	29500 (65040)

2) R320NLC-9

· 6.45 m (21' 2") BOOM and 3.20 m (10' 6") ARM

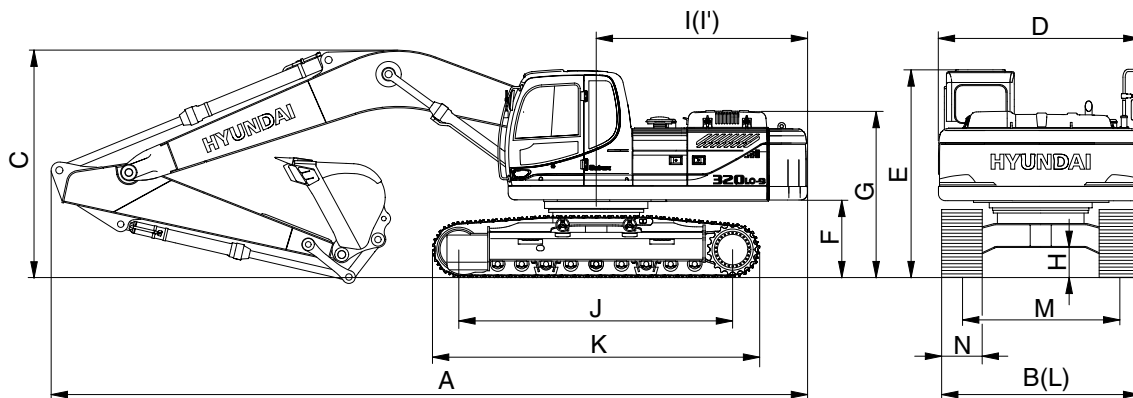


32092SP03

Description		Unit	Specification
Operating weight		kg (lb)	32000 (70500)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	1.44 (1.88)
Overall length	A	mm (ft-in)	10980 (36' 0")
Overall width, with 600 mm shoe	B		2990 (9' 10")
Overall height	C		3380 (11' 1")
Superstructure width	D		2980 (9' 9")
Overall height of cab	E		3090 (10' 2")
Ground clearance of counterweight	F		1200 (3' 11")
Engine cover height	G		2580 (8' 6")
Minimum ground clearance	H		500 (1' 8")
Rear-end distance	I		3265 (10' 9")
Rear-end swing radius	I'		3330 (10' 11")
Distance between tumblers	J		4030 (13' 3")
Undercarriage length	K		4940 (16' 2")
Undercarriage width	L		2990 (9' 10")
Track gauge	M		2390 (7' 10")
Track shoe width, standard	N		600 (24")
Travel speed (low/high)			km/hr (mph)
Swing speed		rpm	9.2
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm ² (psi)	0.61 (8.67)
Max traction force		kg (lb)	29500 (65040)

3) R320LC-9 HIGH WALKER

· 6.45 m (21' 2") BOOM and 3.20 m (10' 6") ARM

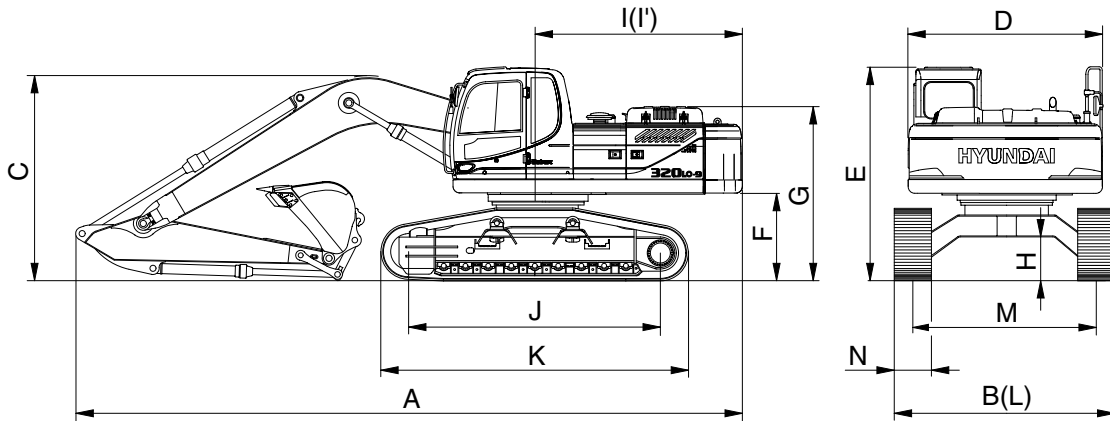

32092SP04

Description		Unit	Specification	
Operating weight		kg (lb)	34700 (76500)	
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	1.44 (1.88)	
Overall length	A	mm (ft-in)	10910 (35' 10")	
Overall width, with 600 mm shoe	B		3470 (11' 5")	
Overall height	C		3360 (11' 0")	
Superstructure width	D		2980 (9' 9")	
Overall height of cab	E		3390 (11' 1")	
Ground clearance of counterweight	F		1500 (4' 11")	
Engine cover height	G		2880 (9' 5")	
Minimum ground clearance	H		765 (2' 6")	
Rear-end distance	I		3265 (10' 9")	
Rear-end swing radius	I'		3330 (10' 11")	
Distance between tumbler	J		4030 (13' 3")	
Undercarriage length	K		4940 (16' 2")	
Undercarriage width	L		3470 (11' 5")	
Track gauge	M		2870 (9' 5")	
Track shoe width, standard	N		600 (24")	
Travel speed (low/high)			km/hr (mph)	3.3/5.5 (2.1/3.4)
Swing speed			rpm	9.2
Gradeability		Degree (%)	35 (70)	
Ground pressure (600 mm shoe)		kgf/cm ² (psi)	0.67 (9.53)	
Max traction force		kg (lb)	29500 (65040)	