


2. SPECIFICATIONS

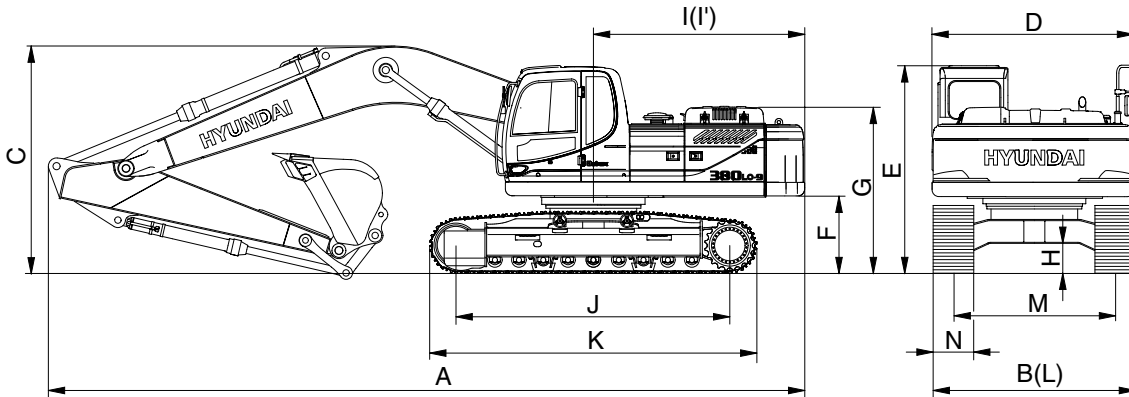

38092SP02

Description		Unit	Specification
Operating weight		kg (lb)	38200 (84220)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	1.62 (2.12)
Overall length	A	mm (ft-in)	11120 (36' 6")
Overall width, with 600 mm shoe	B		3340 (10'11")
Overall height	C		3450 (11' 4")
Superstructure width	D		2980 (9' 9")
Overall height of cab	E		3175 (10' 5")
Ground clearance of counterweight	F		1290 (4' 3")
Engine cover height	G		2790 (9' 2")
Minimum ground clearance	H		550 (1' 10")
Rear-end distance	I		3350 (11' 1")
Rear-end swing radius	I'		3415 (11' 2")
Distance between tumblers	J		4340 (14' 3")
Undercarriage length	K		5280 (17' 4")
Undercarriage width	L		3340 (11' 0")
Track gauge	M		2740 (9' 0")
Track shoe width, standard	N		600 (24")
Travel speed (low/high)		km/hr (mph)	3.0/4.8 (1.9/3.0)
Swing speed		rpm	9.3
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm ² (psi)	0.68 (9.67)
Max traction force		kg (lb)	32000 (70550)