


2. SPECIFICATIONS

1) 3.0m(9'10") ONE PIECE BOOM, 1.6m(5' 3") ARM WITH BOOM SWING POST

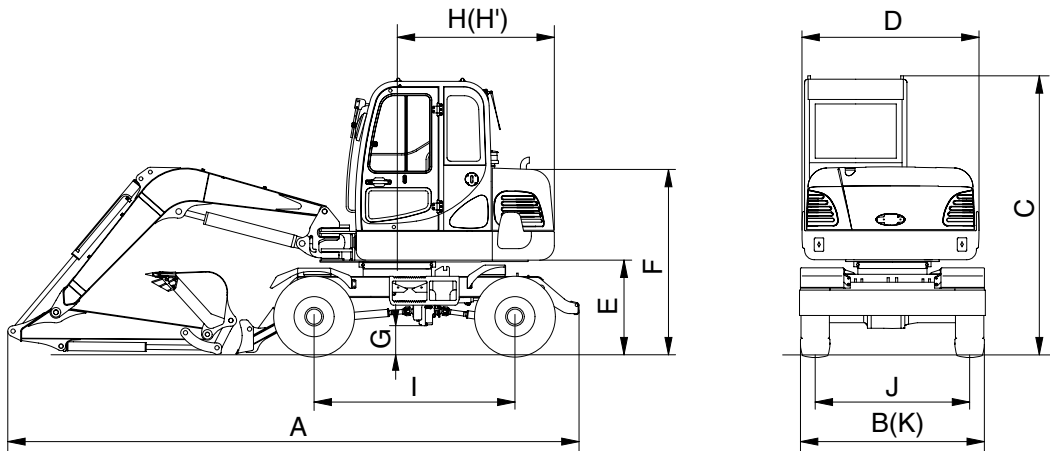

55W7A2SP02

Description		Unit	Specification
Operating weight		kg(lb)	5600(12350)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	0.18(0.24)
Overall length	A	mm(ft-in)	5970(19' 6")
Overall width	B		1925(6' 4")
Overall height	C		2850(9' 4")
Upperstructure width	D		1830(6' 0")
Ground clearance of counterweight	E		986(3' 3")
Engine cover height	F		1930(6' 4")
Minimum ground clearance	G		290(11.4")
Rear-end distance	H		1650(5' 5")
Rear-end swing radius	H'		1650(5' 5")
Wheel base	I		2100(6'11")
Tread	J		1600(5' 3")
Dozer blade width	K		1925(6' 4")
Travel speed	Low		km/hr(mph)
	High	27(16.8)	
Swing speed		rpm	9.3
Gradeability		Degree(%)	35(70)