


2. SPECIFICATIONS

1) 3.0 m (9'10") MONO BOOM, 1.6 m (5' 3") ARM WITH BOOM SWING SYSTEM

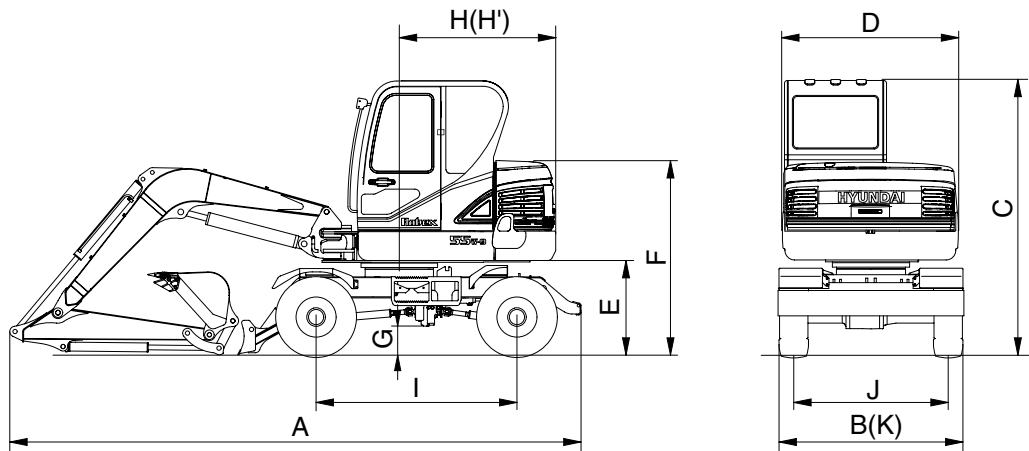

55W92SP02

Description		Unit	Specification
Operating weight		kg (lb)	5550 (12240)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	0.18 (0.24)
Overall length	A	mm (ft-in)	5970 (19' 6")
Overall width	B		1925 (6' 4")
Overall height	C		2850 (9' 4")
Upperstructure width	D		1850 (6' 1")
Ground clearance of counterweight	E		986 (3' 3")
Engine cover height	F		1970 (6' 6")
Minimum ground clearance	G		290 (11.4")
Rear-end distance	H		1650 (5' 5")
Rear-end swing radius	H'		1650 (5' 5")
Wheel base	I		2100 (6'11")
Tread	J		1600 (5' 3")
Dozer blade width	K		1925 (6' 4")
Travel speed	Low		km/hr (mph)
	High	30 (18.6)	
Swing speed		rpm	9.1
Gradeability		Degree (%)	35 (70)
Max traction force		kg (lb)	3500 (7720)