



## 1. BOOM RAISE OPERATION

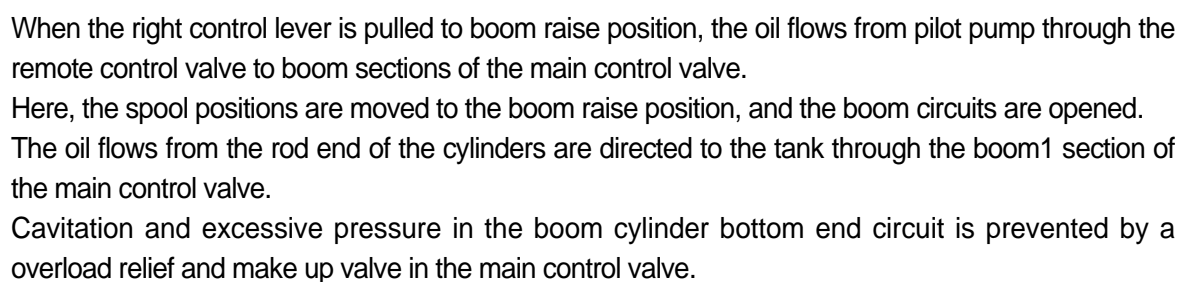

## 2. BOOM DOWN OPERATION

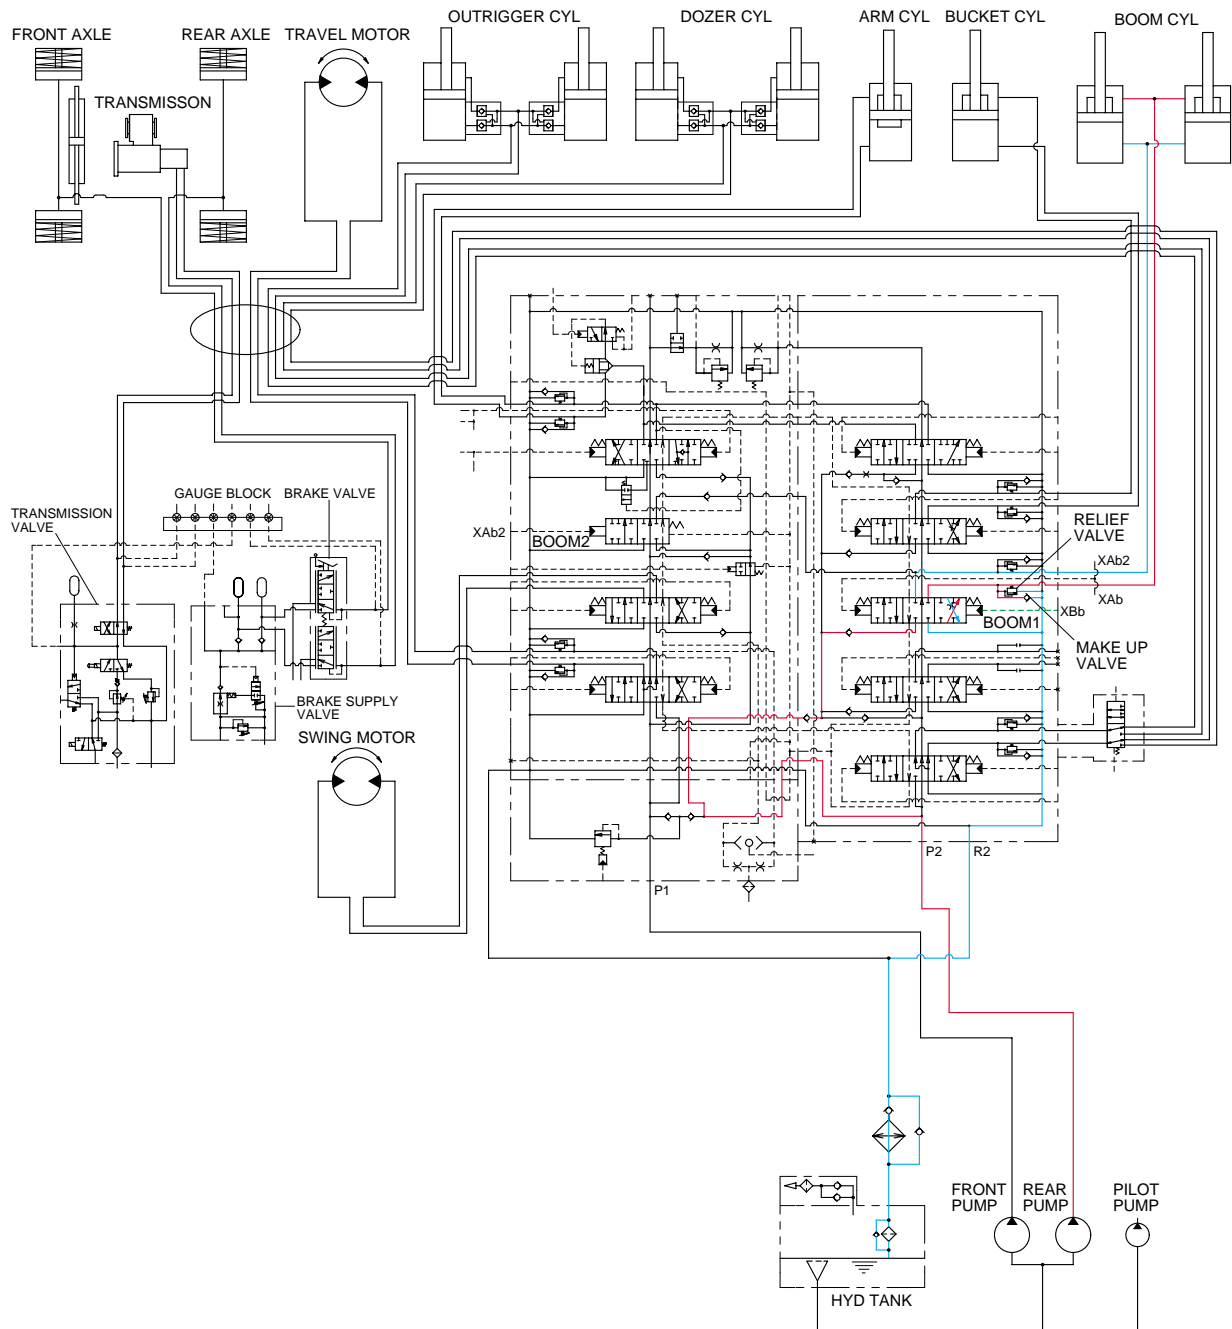


When the right control lever is pushed forward to boom down position, the oil flows from pilot pump through the remote control valve to boom section of the main control valve. Here, the spool positions are move to the boom down position, and the boom down circuit is opened.

Oil flows from rear pump through boom1 section of the main control valve to the rod end of the boom cylinders, and to down the boom.

The return oil flows from the bottom end of the cylinders to the tank through the boom1 section of the main control valve.

Cavitation end excessive pressure in the boom cylinder rod end circuit is prevented by a overload relief and make up valve in the control valve.

### 3. ARM ROLL IN OPERATION

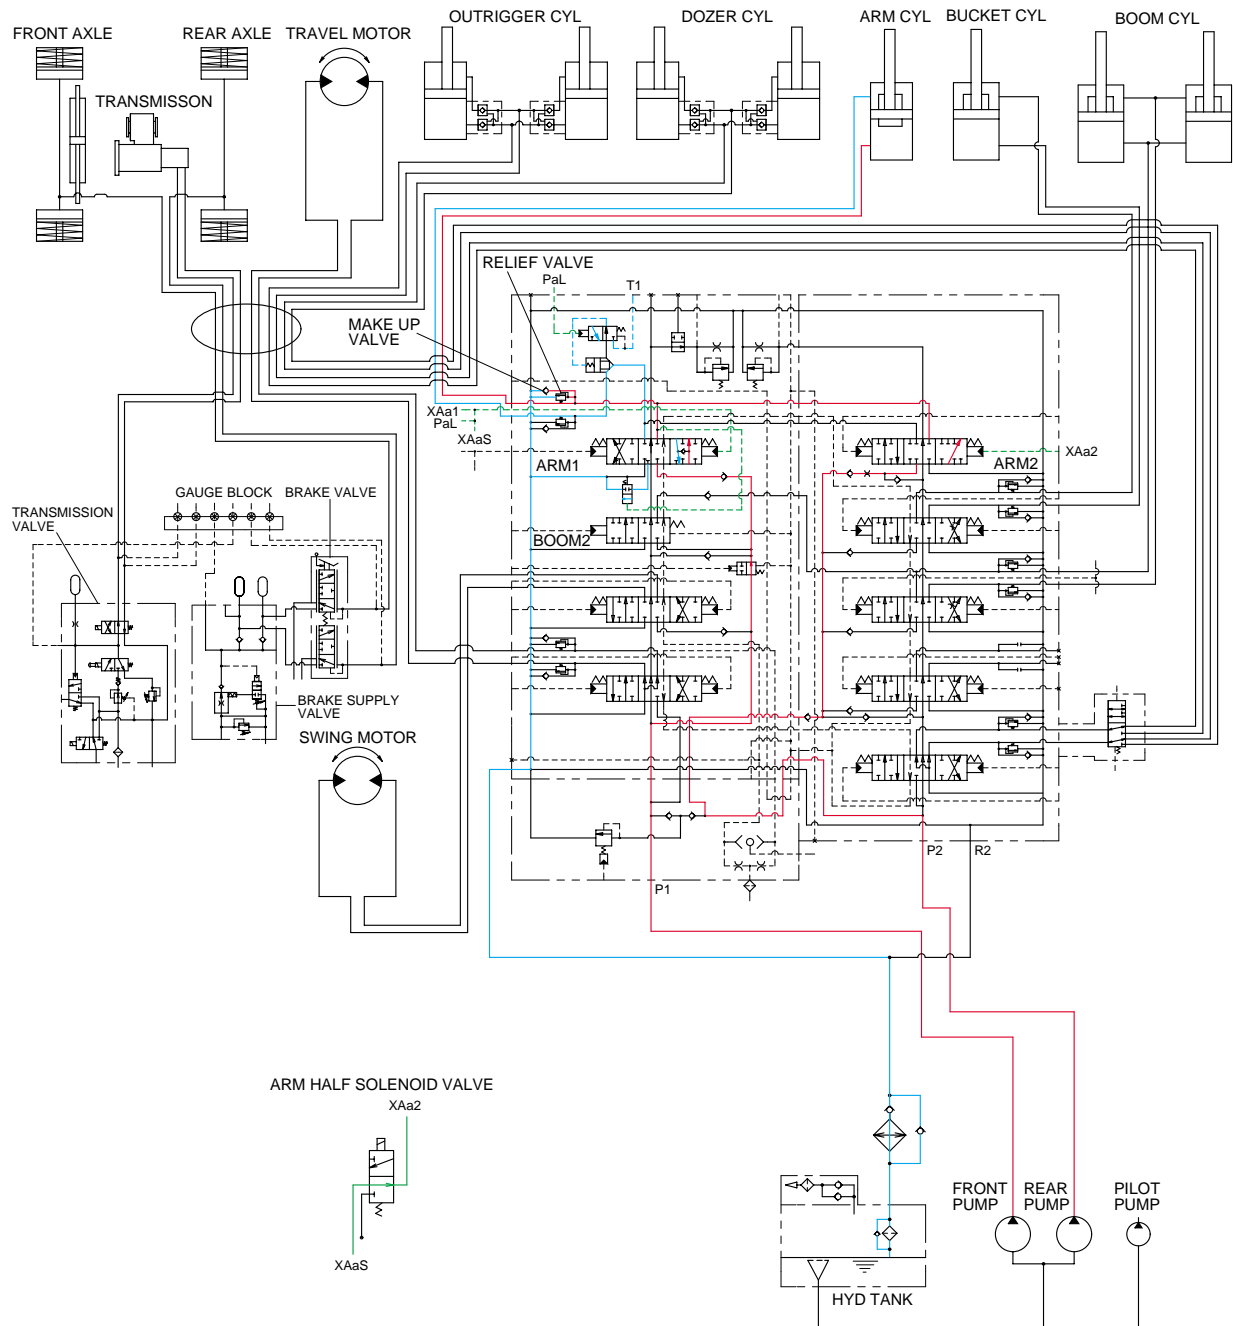

When the left control lever is pulled back, the arm spools in the main control valve are moved to the roll in position by the pilot oil pressure from the remote control valve.


The oil from the front and rear pump flows into the main control valve and then goes to the large chamber of arm cylinder.

At the same time, the oil from the small chamber of arm cylinder returns to the hydraulic oil tank through the arm spool in the main control valve. When this happens, the arm rolls in.

The cavitation which will happen to the bottom of the arm cylinder is also prevented by the make-up valve in the main control valve.

For arm half function, refer to page 3-10.

#### 4. ARM ROLL OUT OPERATION

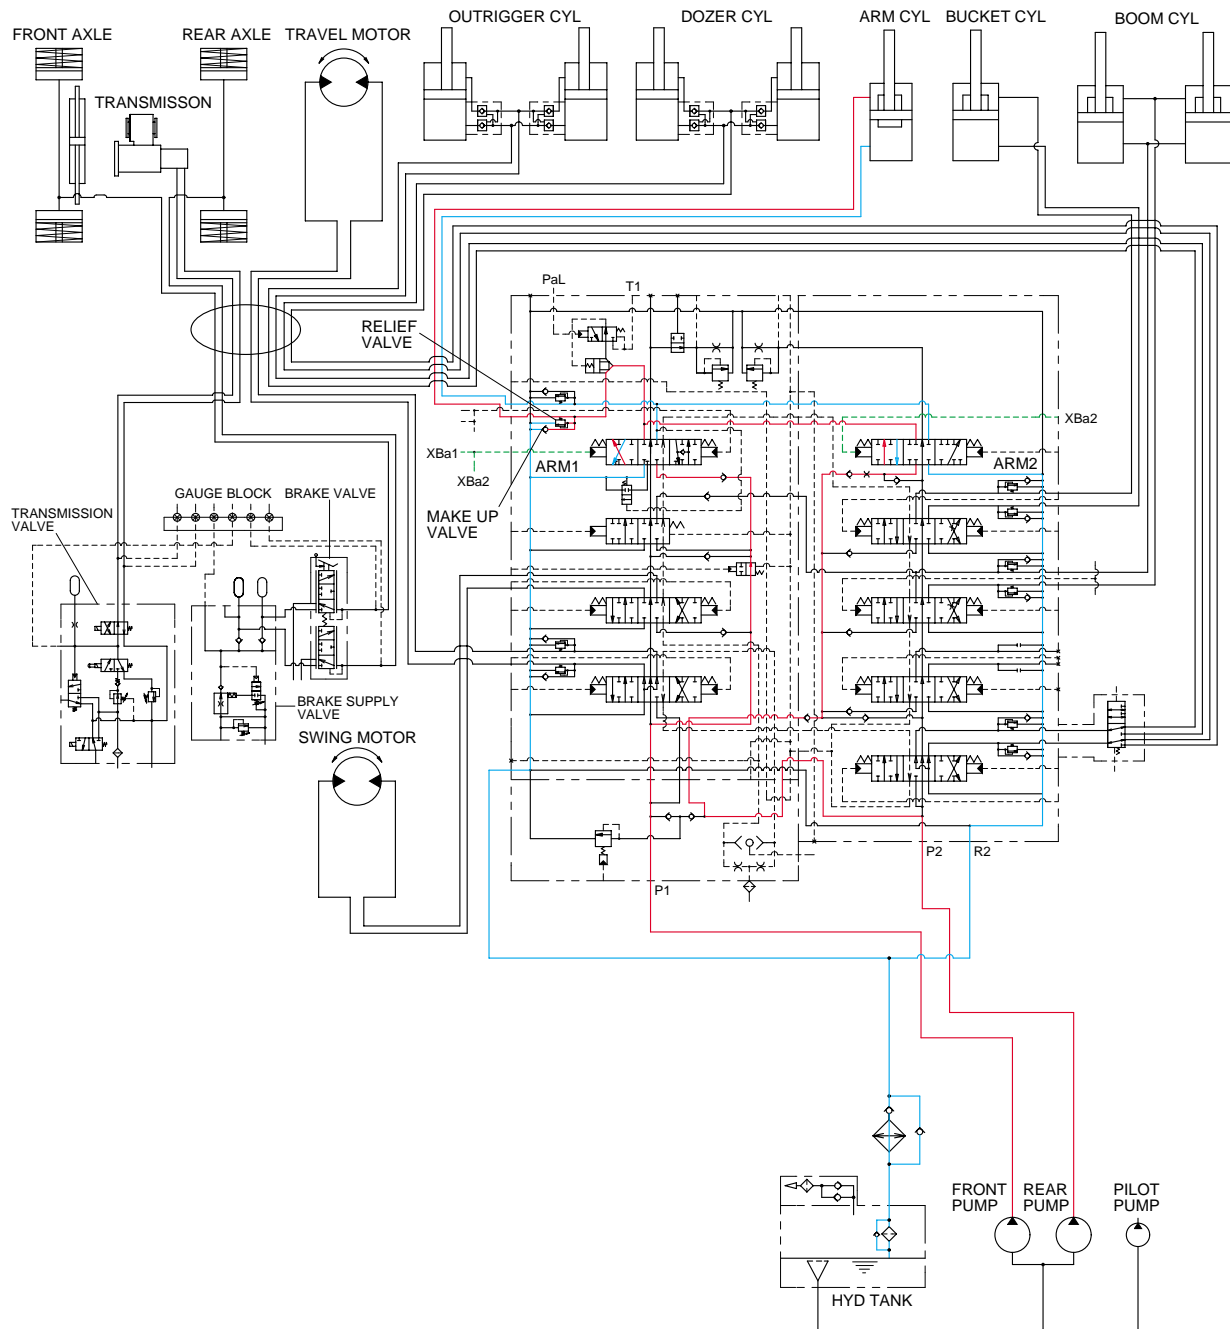


When the left control lever is pushed forward, the arm spools in the main control valve are moved to the roll out position by the pilot oil pressure from the remote control valve.

The oil from the front and rear pump flows into the main control valve and then goes to the small chamber of arm cylinder.

At the same time, the oil from the large chamber of arm cylinder returns to the hydraulic oil tank through the arm spool in the main control valve. When this happens, the arm rolls out.

The cavitation which will happen to the rod of the arm cylinder is also prevented by the make-up valve in the main control valve.

## 5. BUCKET ROLL IN OPERATION

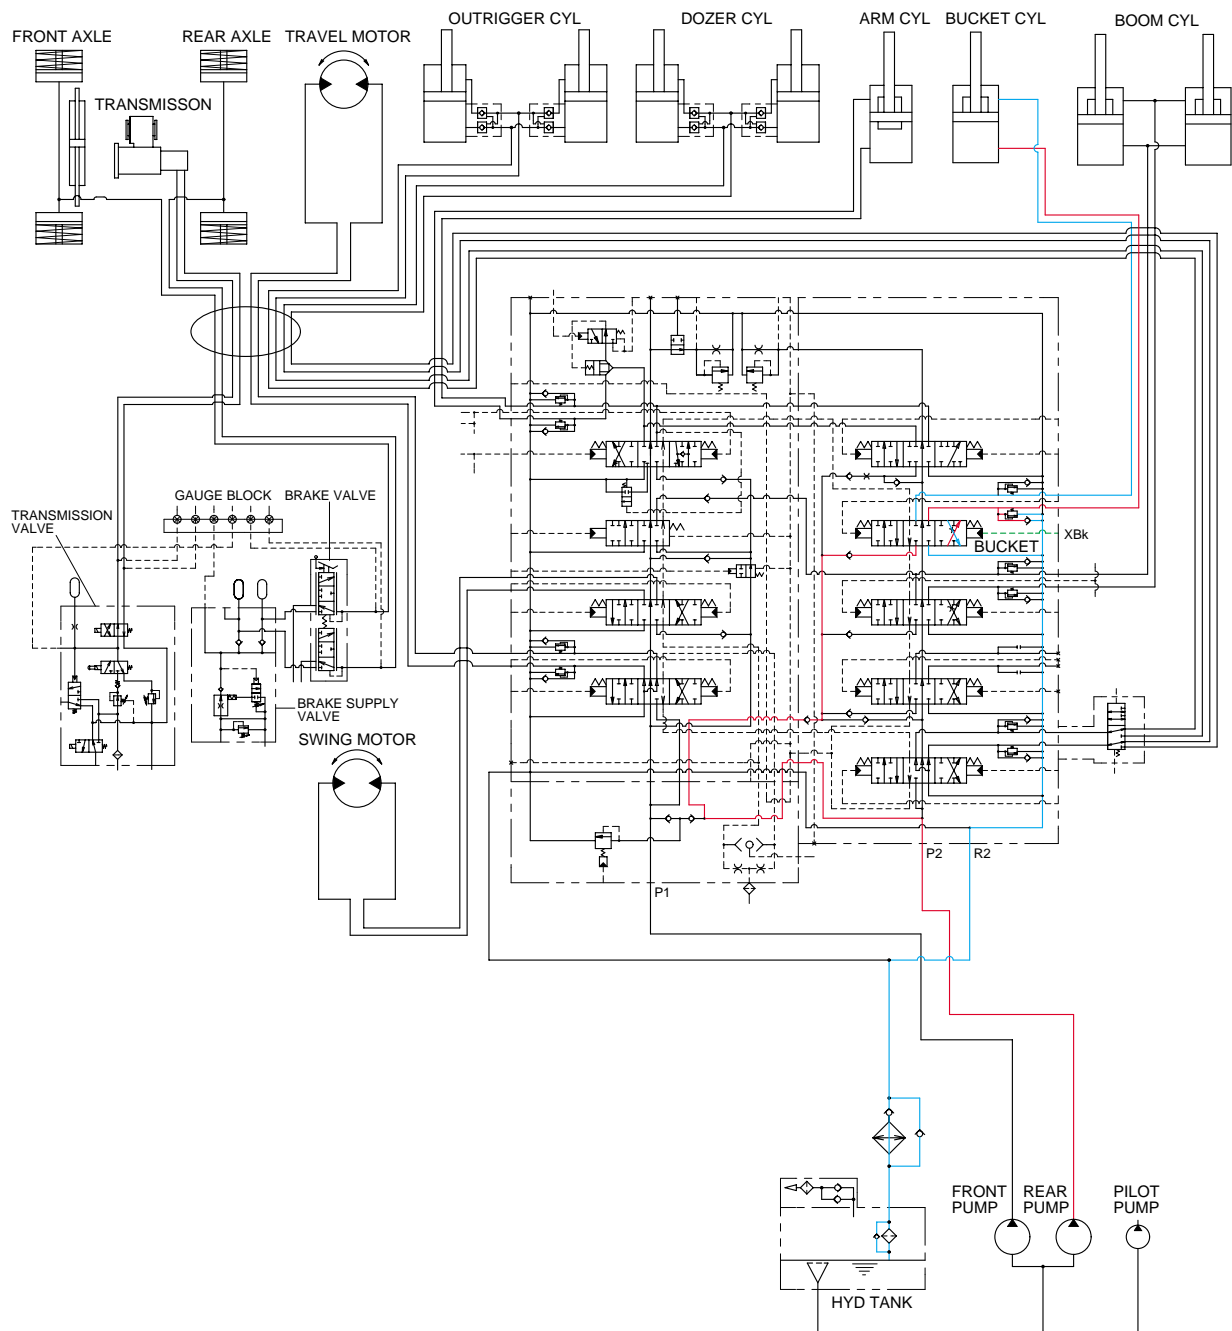


When the right control lever is pulled left, the bucket spool in the main control valve is moved to the roll in position by the pilot oil pressure from the remote control valve.

The oil from the rear pump flows into the main control valve and then goes to the large chamber of bucket cylinder.

At the same time, the oil from the small chamber of bucket cylinder returns to the hydraulic oil tank through the bucket spool in the main control valve. When this happens, the bucket rolls in.

The cavitation which will happen to the bottom of the bucket cylinder is also prevented by the make-up valve in the main control valve.

## 6. BUCKET ROLL OUT OPERATION

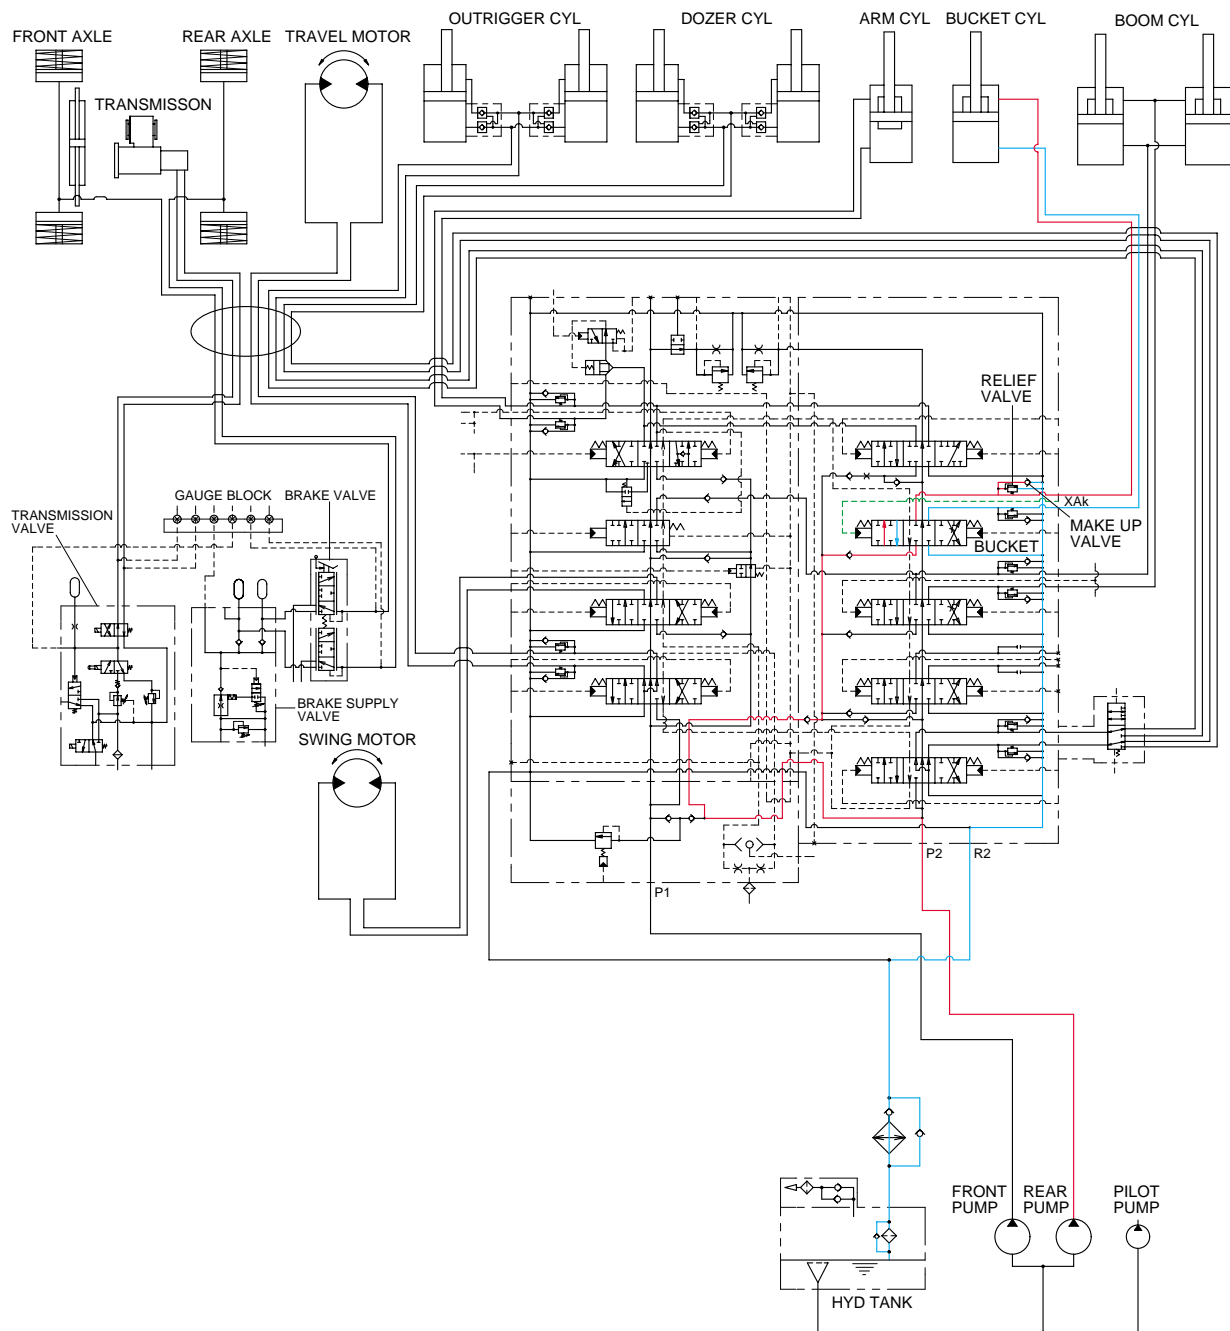


When the right control lever is pushed right, the bucket spool in the main control valve is moved to the roll out position by the pilot oil pressure from the remote control valve.

The oil from the rear pump flows into the main control valve and then goes to the small chamber of bucket cylinder.

At the same time, the oil from the large chamber of bucket cylinder returns to the hydraulic oil tank through the bucket spool in the main control valve. When this happens, the bucket rolls out.

The cavitation which will happen to the rod of the bucket cylinder is also prevented by the make-up valve in the main control valve.

## 7. DOZER UP OPERATION

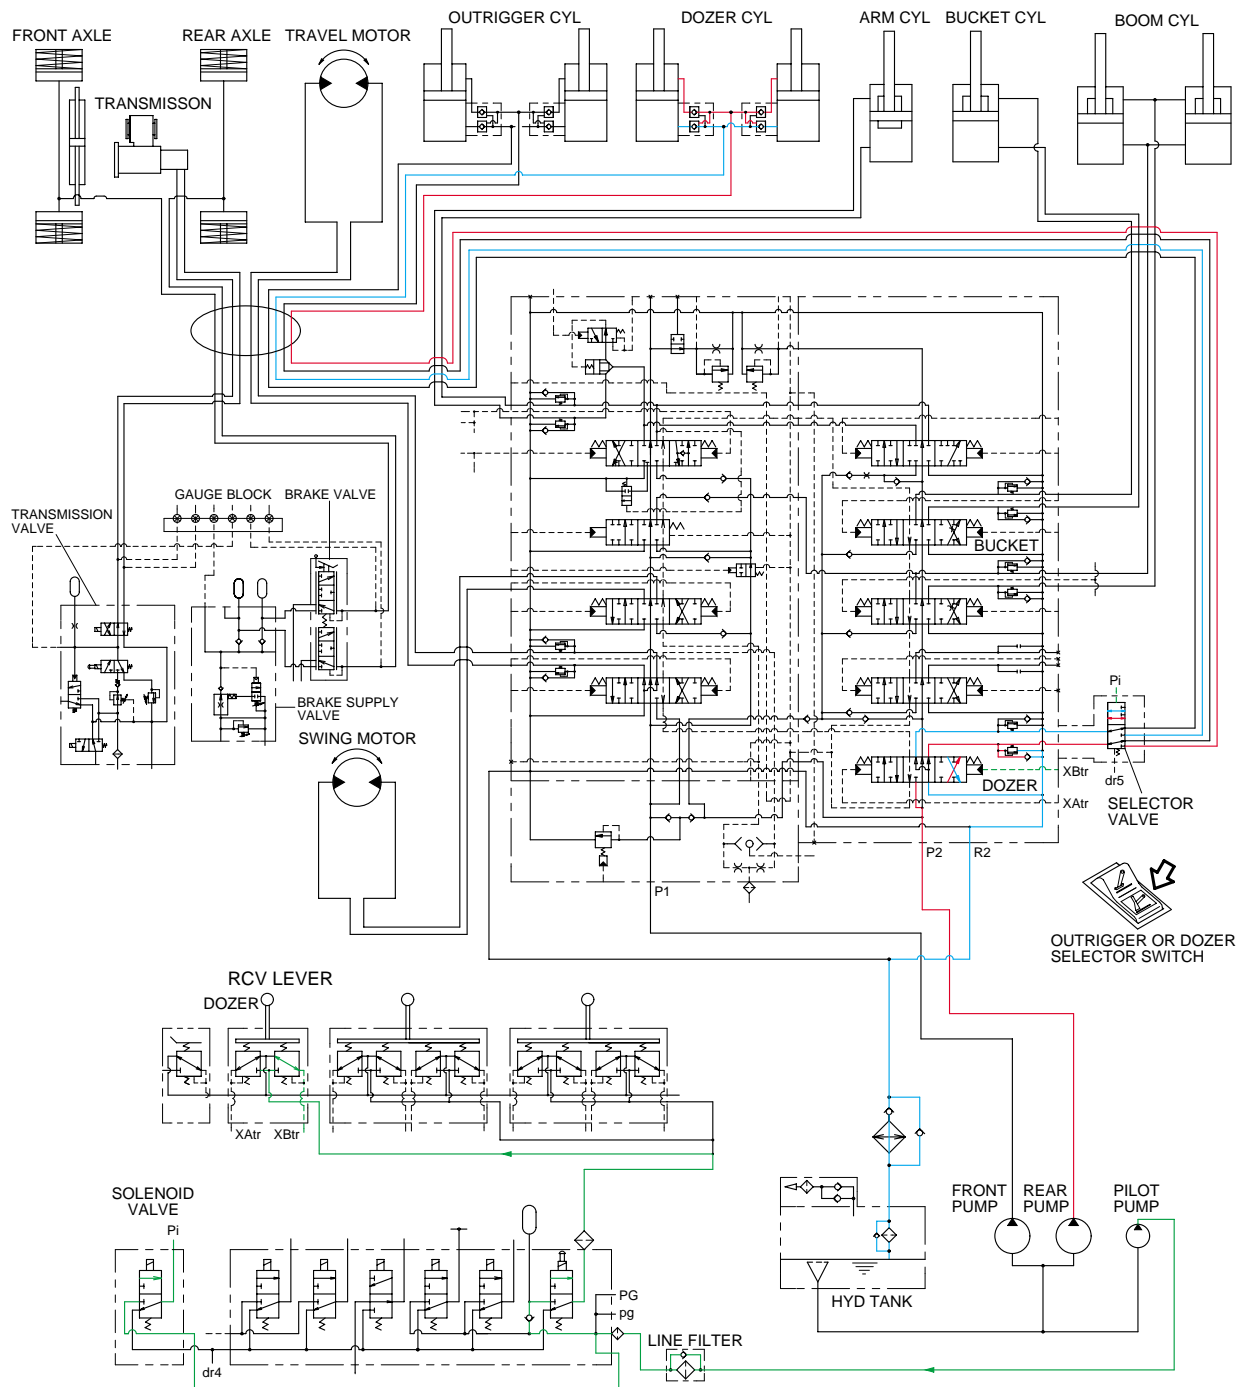

Push the outrigger or dozer selector switch on the switch panel to the dozer position.


Then, the oil from pilot gear pump will go through the solenoid valve and make the selector valve move to the dozer position.

When the dozer control lever is pulled back, the dozer spool in the main control valve is moved to the dozer up position by the pilot oil pressure from the remote control valve.

The oil from the front pump flows into the main control valve and then goes to the small chamber of dozer cylinders.

At the same time, the oil from the large chamber of dozer cylinders returns to the hydraulic oil tank through the dozer spool in the main control valve. When this happens, the dozer goes up.

## 8. DOZER DOWN OPERATION

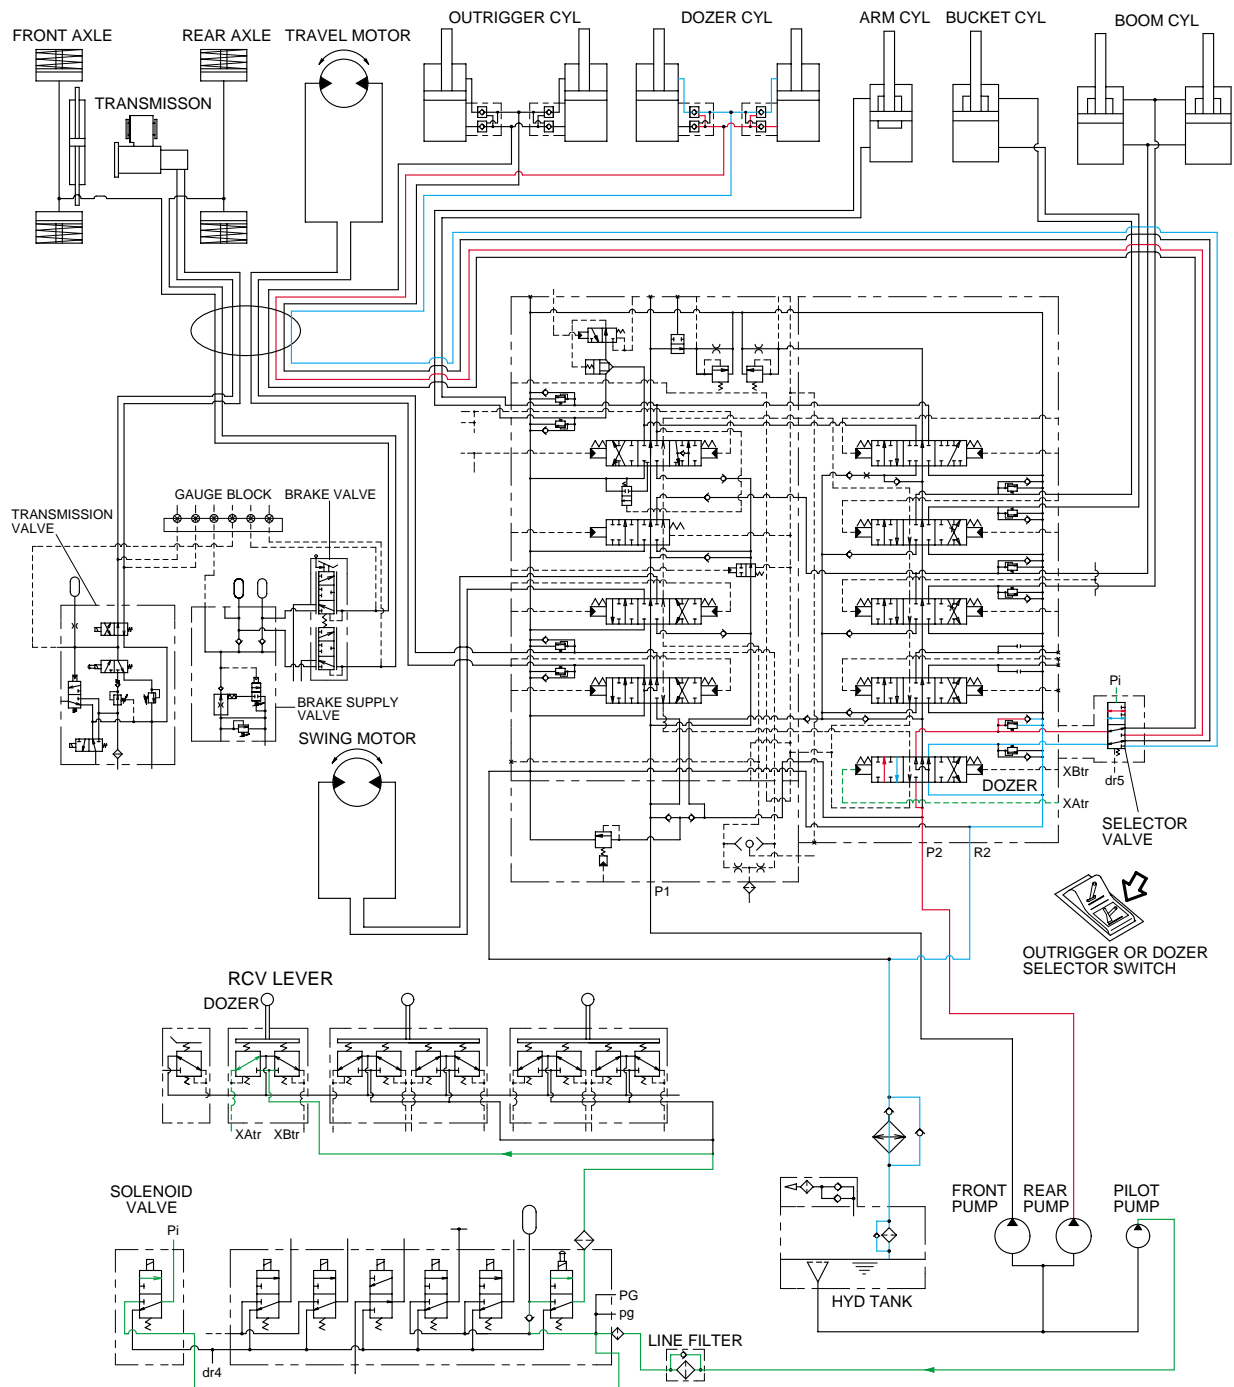

Push the outrigger or dozer selector switch on the switch panel to the dozer position.

Then, the oil from pilot gear pump will go through the solenoid valve and make the selector valve move to the dozer position.


When the dozer control lever is pushed forward, the dozer spool in the main control valve is moved to the dozer down position by the pilot oil pressure from the remote control valve.

The oil from the front pump flows into the main control valve and then goes to the large chamber of dozer cylinders.

At the same time, the oil from the small chamber of dozer cylinders returns to the hydraulic oil tank through the dozer spool in the main control valve. When this happens, the dozer blade is down.



## 9. OUTRIGGER UP OPERATION

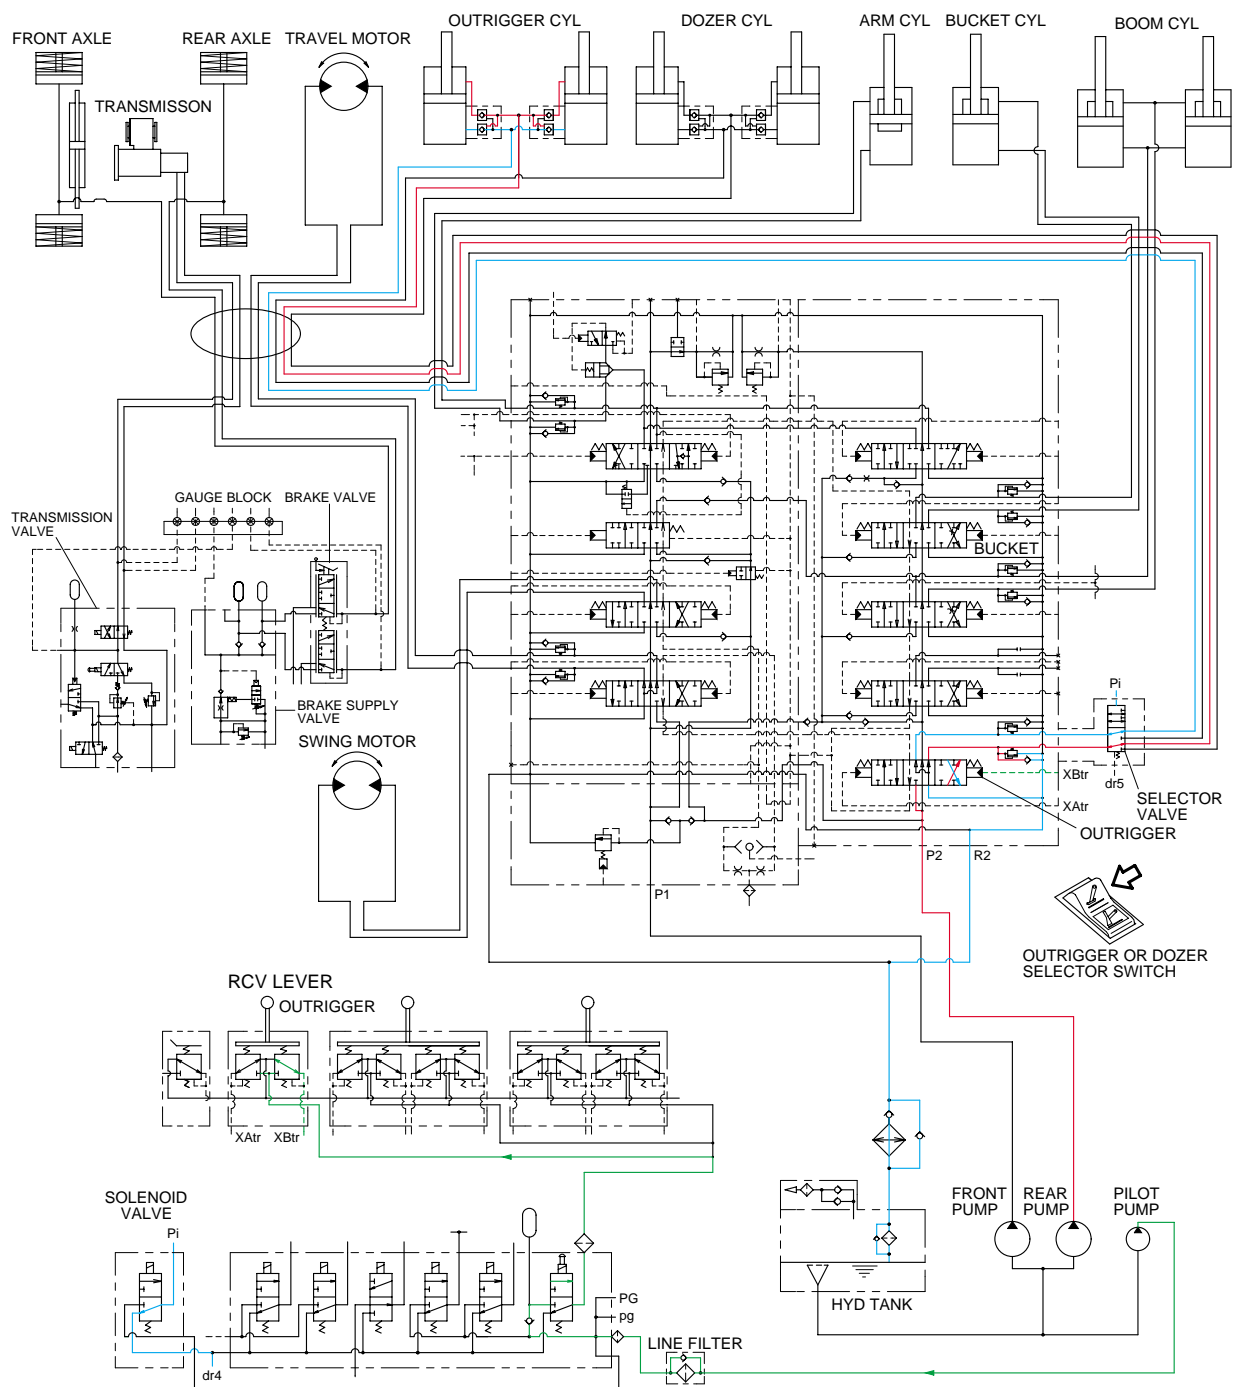

Push the outrigger or dozer selector switch on the switch panel to the outrigger position.


Then, the pilot oil of the selector valve is connected with drain line through solenoid valve, so the selector valve move to the outrigger position.

When the outrigger control lever is pulled back, the outrigger spool in the main control valve is moved to the outrigger up position by the pilot oil pressure from the remote control valve.

The oil from the front pump flows into the main control valve and then goes to the small chamber of outrigger cylinders.

At the same time, the oil from the large chamber of outrigger cylinders returns to the hydraulic oil tank through the outrigger spool in the main control valve. When this happens, the outrigger goes up.

## 10. OUTRIGGER DOWN OPERATION

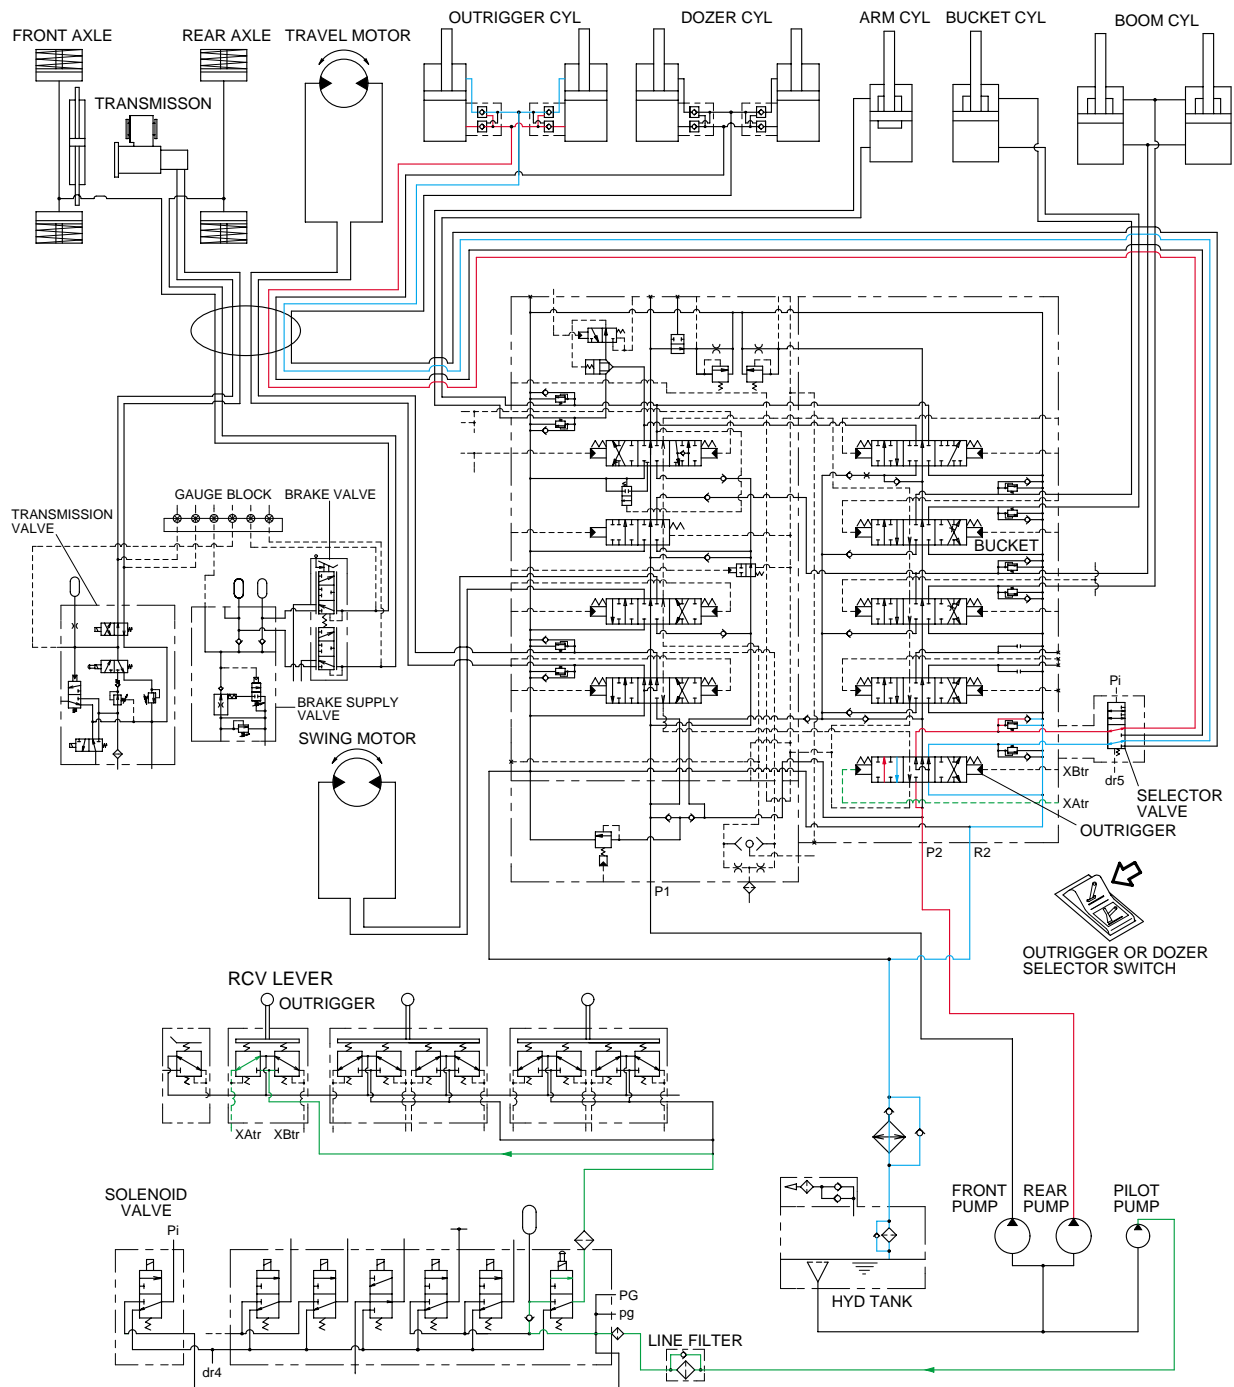

Push the outrigger or dozer selector switch on the switch panel to the outrigger position.


Then, the pilot oil of the selector valve is connected with drain line through solenoid valve, so the selector valve move to the outrigger position.

When the outrigger control lever is pushed forward, the outrigger spool in the main control valve is moved to the outrigger down position by the pilot oil pressure from the remote control valve.

The oil from the front pump flows into the main control valve and then goes to the large chamber of outrigger cylinders.

At the same time, the oil from the small chamber of outrigger cylinders returns to the hydraulic oil tank through the outrigger spool in the main control valve. When this happens, the outrigger is down.

## 11. SWING OPERATION

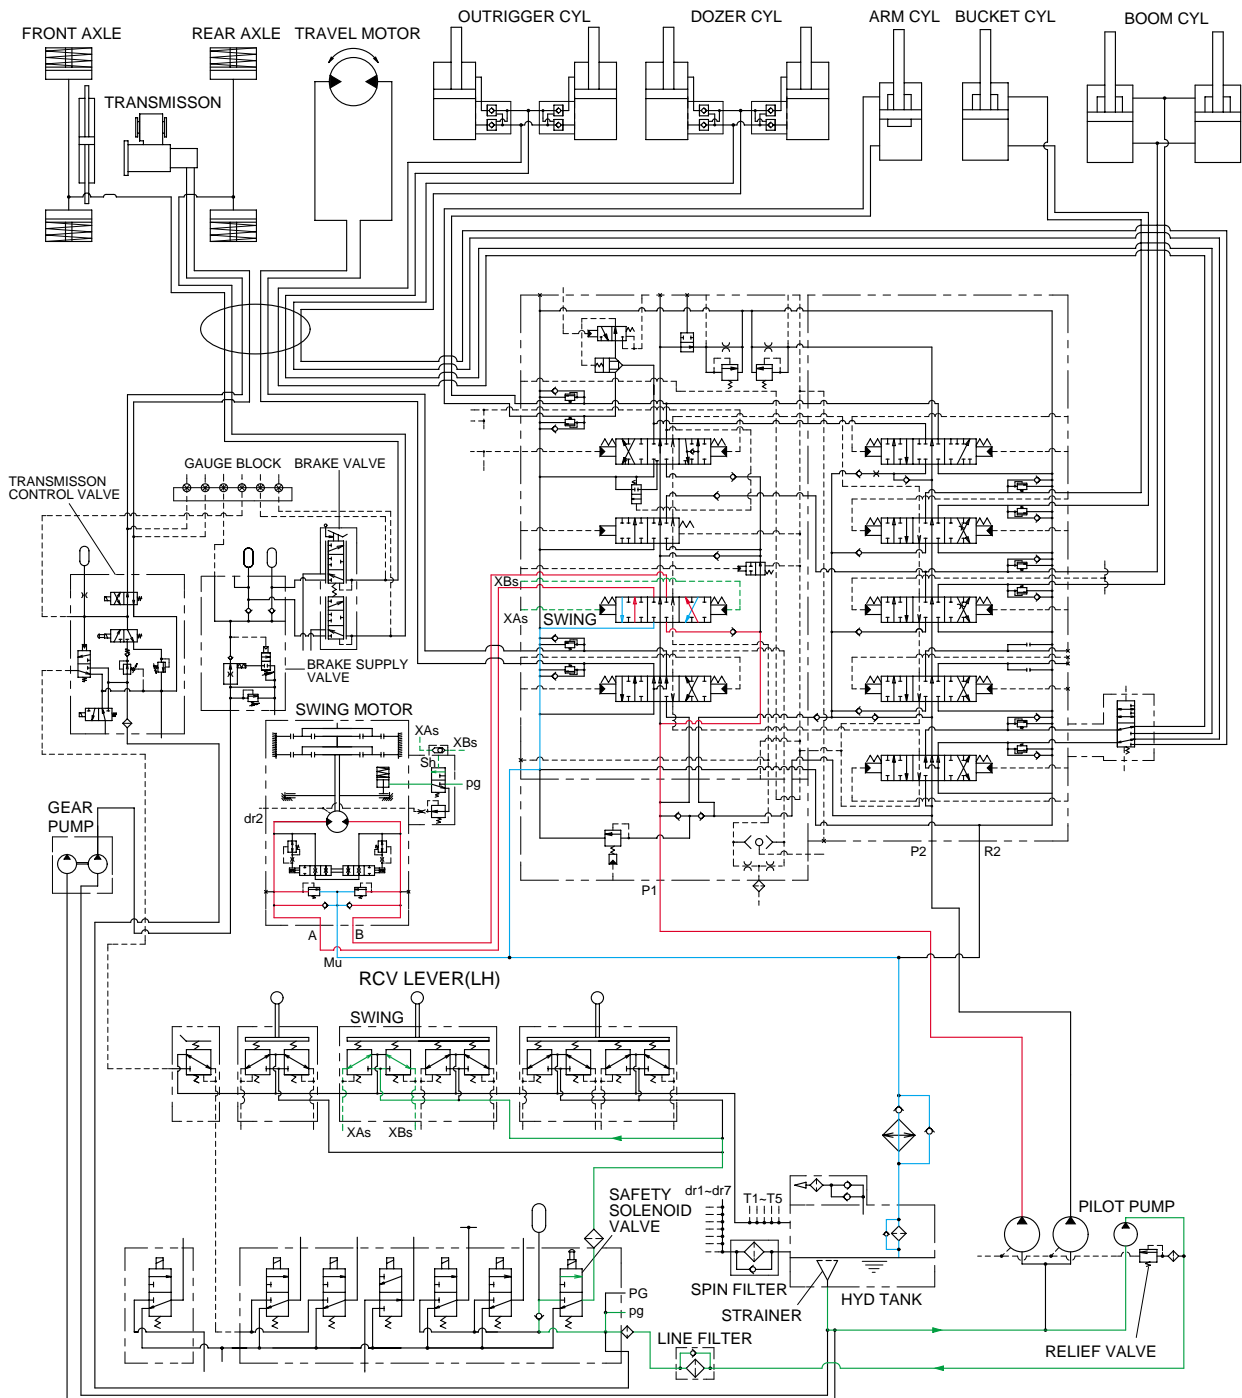

When the left control lever is pushed left or right, the swing spool in the main control valve is moved to the left or right swing position by the pilot oil pressure from the remote control valve.


The oil from the rear pump flows into the main control valve and then goes to the swing motor.

At the same time, the oil returned from the swing motor returns to the hydraulic oil tank through the swing spool in the main control valve.

When this happens, the superstructure swings left or right.

The swing parking brake, make up valve and the overload relief valve are provided in the swing motors. The cavitation which will happen to the swing motor is also prevented by the make-up valve in the swing motor itself.

## SWING CIRCUIT OPERATION

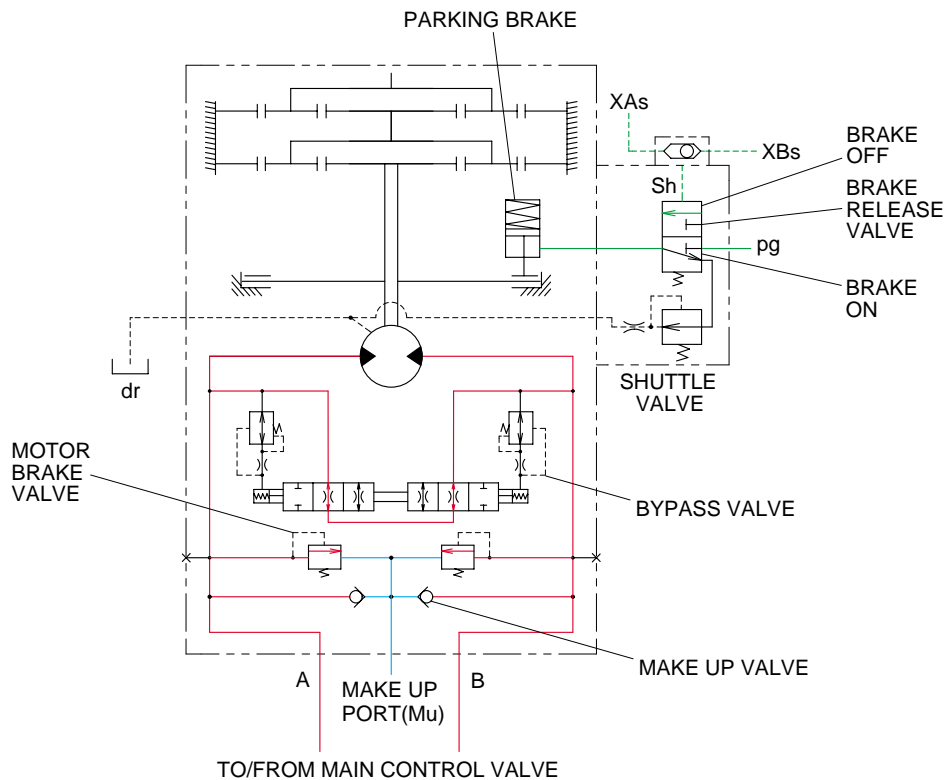

### 1) MOTOR BRAKE VALVE

Motor brake valve for the swing motor limits to cushion the starting and stopping pressure of swing operation.

### 2) MAKE UP VALVE

The make up valves prevent cavitation by supplying return oil to the vacuum side of the motor.

### 3) PARKING BRAKE

In case that the parking of the machine at slope is required during operation, there is the danger of involuntary swing caused by the self weight of the machine. The brake is connected to prevent this involuntary swing.

#### PARKING BRAKE "OFF" OPERATION

The parking brake is released by the pilot pressure oil from the pilot pump.

When the left control lever is placed in the swing position, the pilot pressure at the shuttle valve is transferred to the brake release valve and the brake release valve is changed over. Then the pilot pressure lifts the brake piston and releases the parking brake.

#### PARKING BRAKE "ON" OPERATION


When the control lever is placed in the neutral position, the pressure of the pilot oil passage goes down.

Then the brake release valve is returned to the neutral position and the oil is returned from the brake piston to the tank. And the brake is set to "ON".

### 4) BYPASS VALVE

This bypass valve absorbs shocks produced as swing motion stops and reduced oscillation cause by swing motion.

## 12. TRAVEL FORWARD AND REVERSE OPERATION

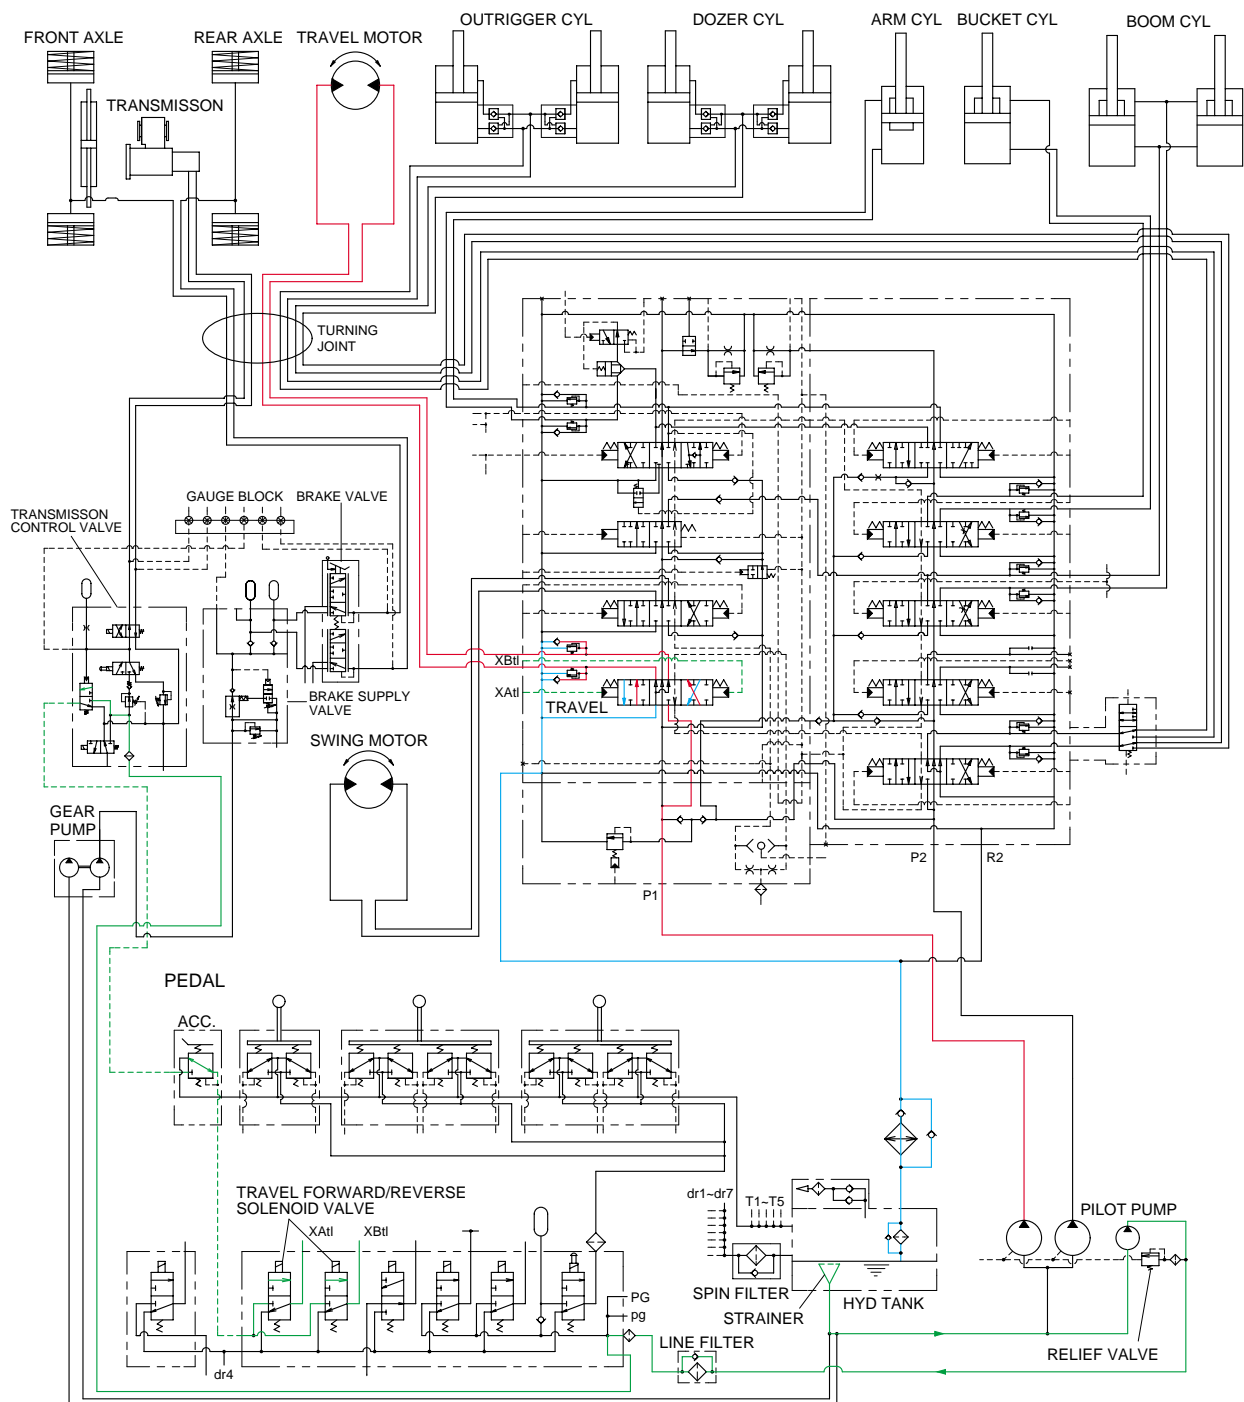


When the LH multifunction switch is placed in forward or reverse position, the travel spool in the main control valve is moved to the forward or reverse position by the pilot oil pressure from pilot pump through the travel pilot solenoid of transmission control valve and travel Forward/Reverse solenoid valve. The oil from the rear pump flows into the main control valve and then goes to the travel motor. At the same time, the oil returned from the travel motor returns to the hydraulic oil tank through the turning joint and travel spool in the main control valve.

When this happens, the machine moves forward or reverse.

The cavitation which will happen to the travel motor is prevented by the make-up valve in the main control valve.

## TRAVEL CIRCUIT OPERATION

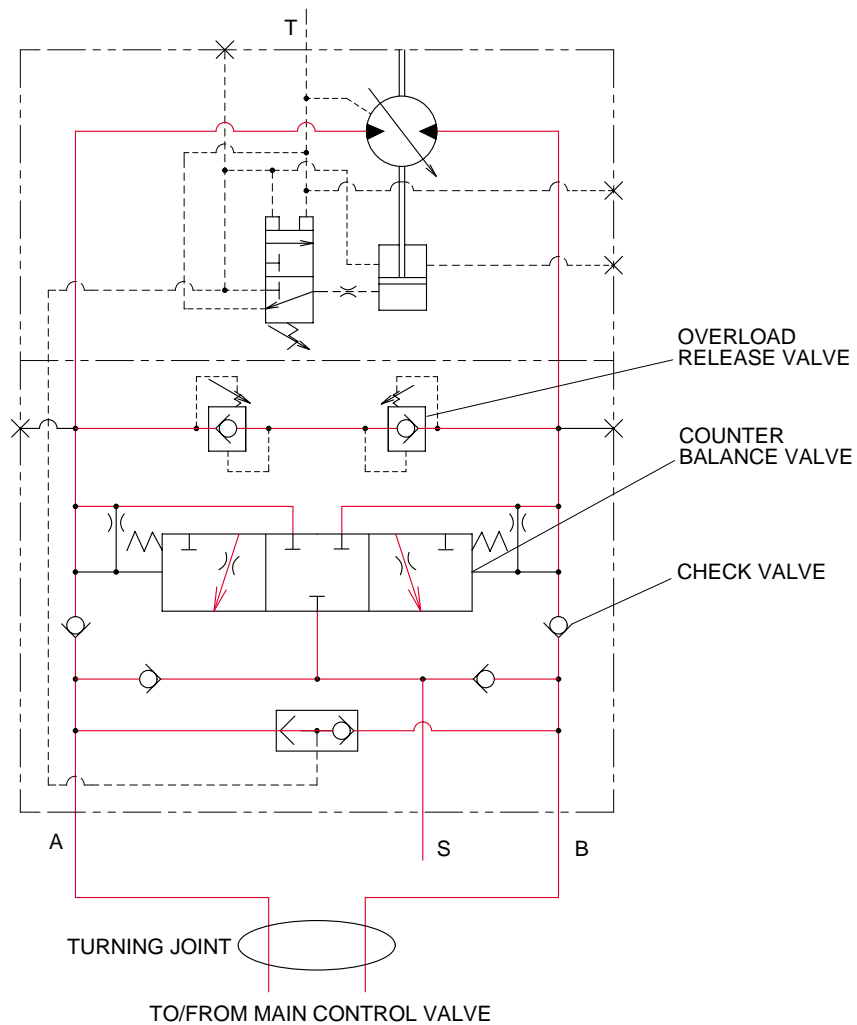

Valves are provided on travel motors to offer the following functions.


### 1) COUNTER BALANCE VALVE

When stopping the motor on a slope descending, this valve prevents the motor from over running.

### 2) OVERLOAD RELIEF VALVE


Relief valve limits the circuit pressure below  $350\text{kgf/cm}^2$  to prevent high pressure from being generated at the time of stopping the machine. When stopping the motor, this valve sucks the oil from lower pressure passage for preventing the negative pressure and the cavitation of the motor.

### 13. FRONT AND REAR AXLE BRAKE SYSTEM(SERVICE BRAKE)

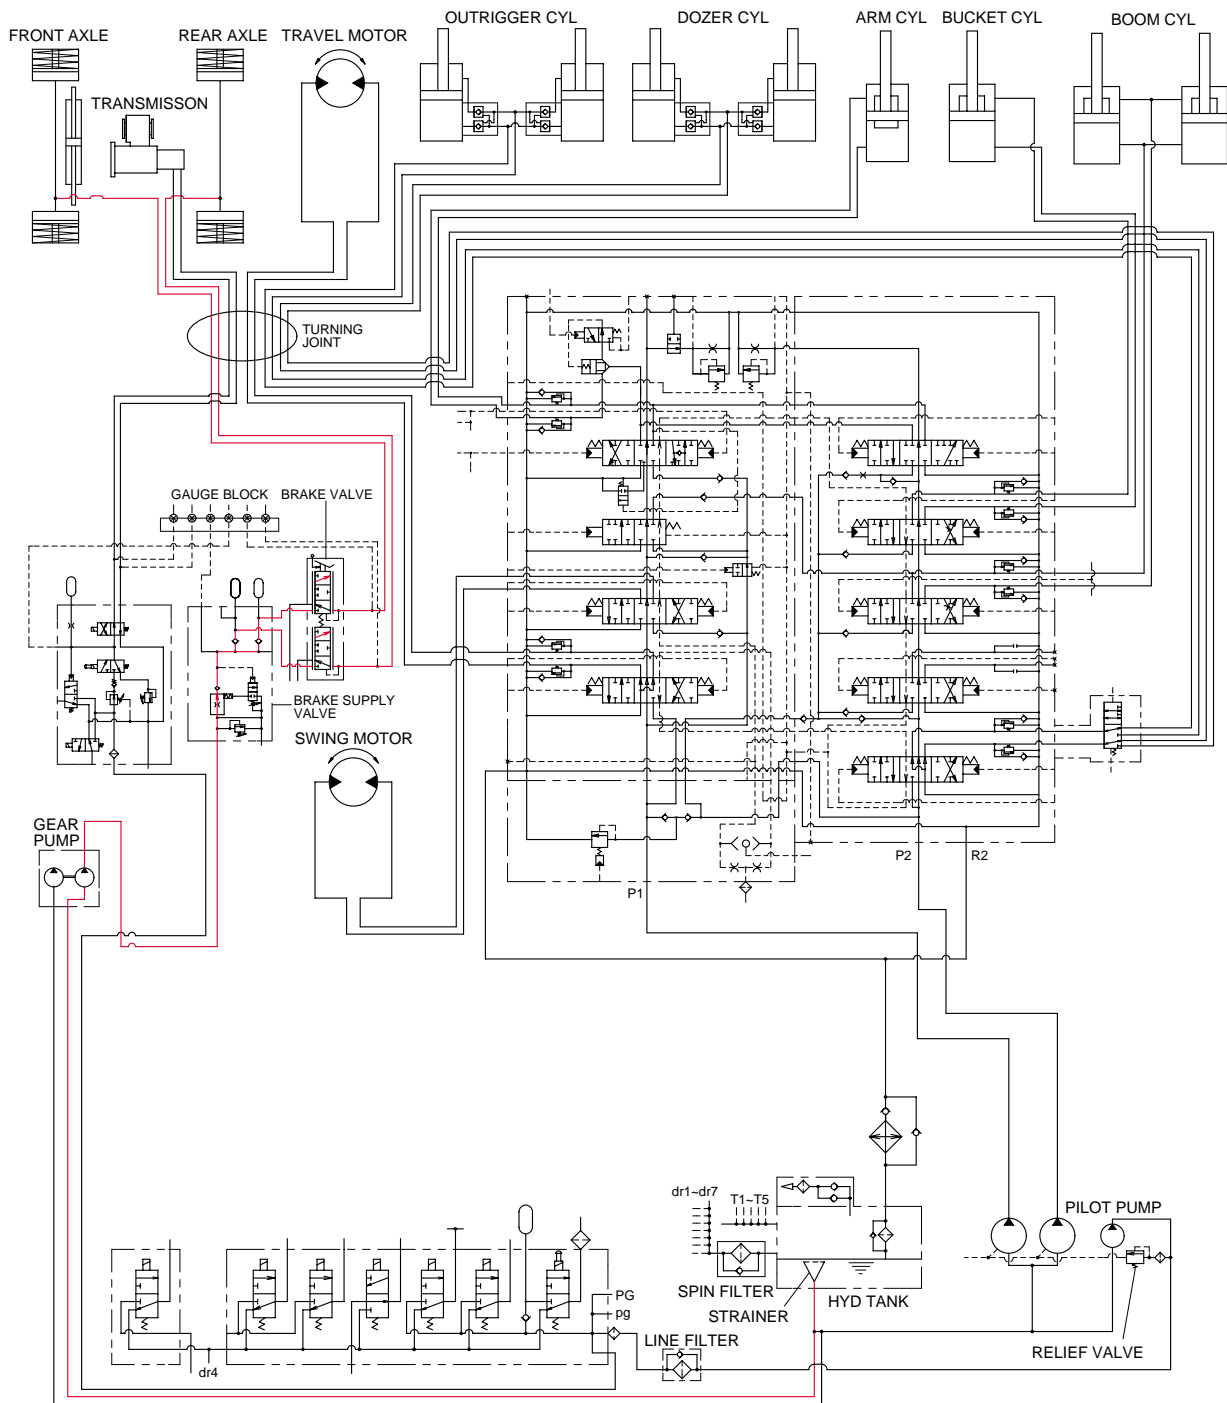

When the brake pedal(Valve) is pushed, the discharged oil from the gear pump flows into the front and rear axle brake disc through the solenoid valve of brake supply valve. This pressure is applied to axle brake disc, thus the brake is applied.

## 14. STEERING CIRCUIT OPERATION

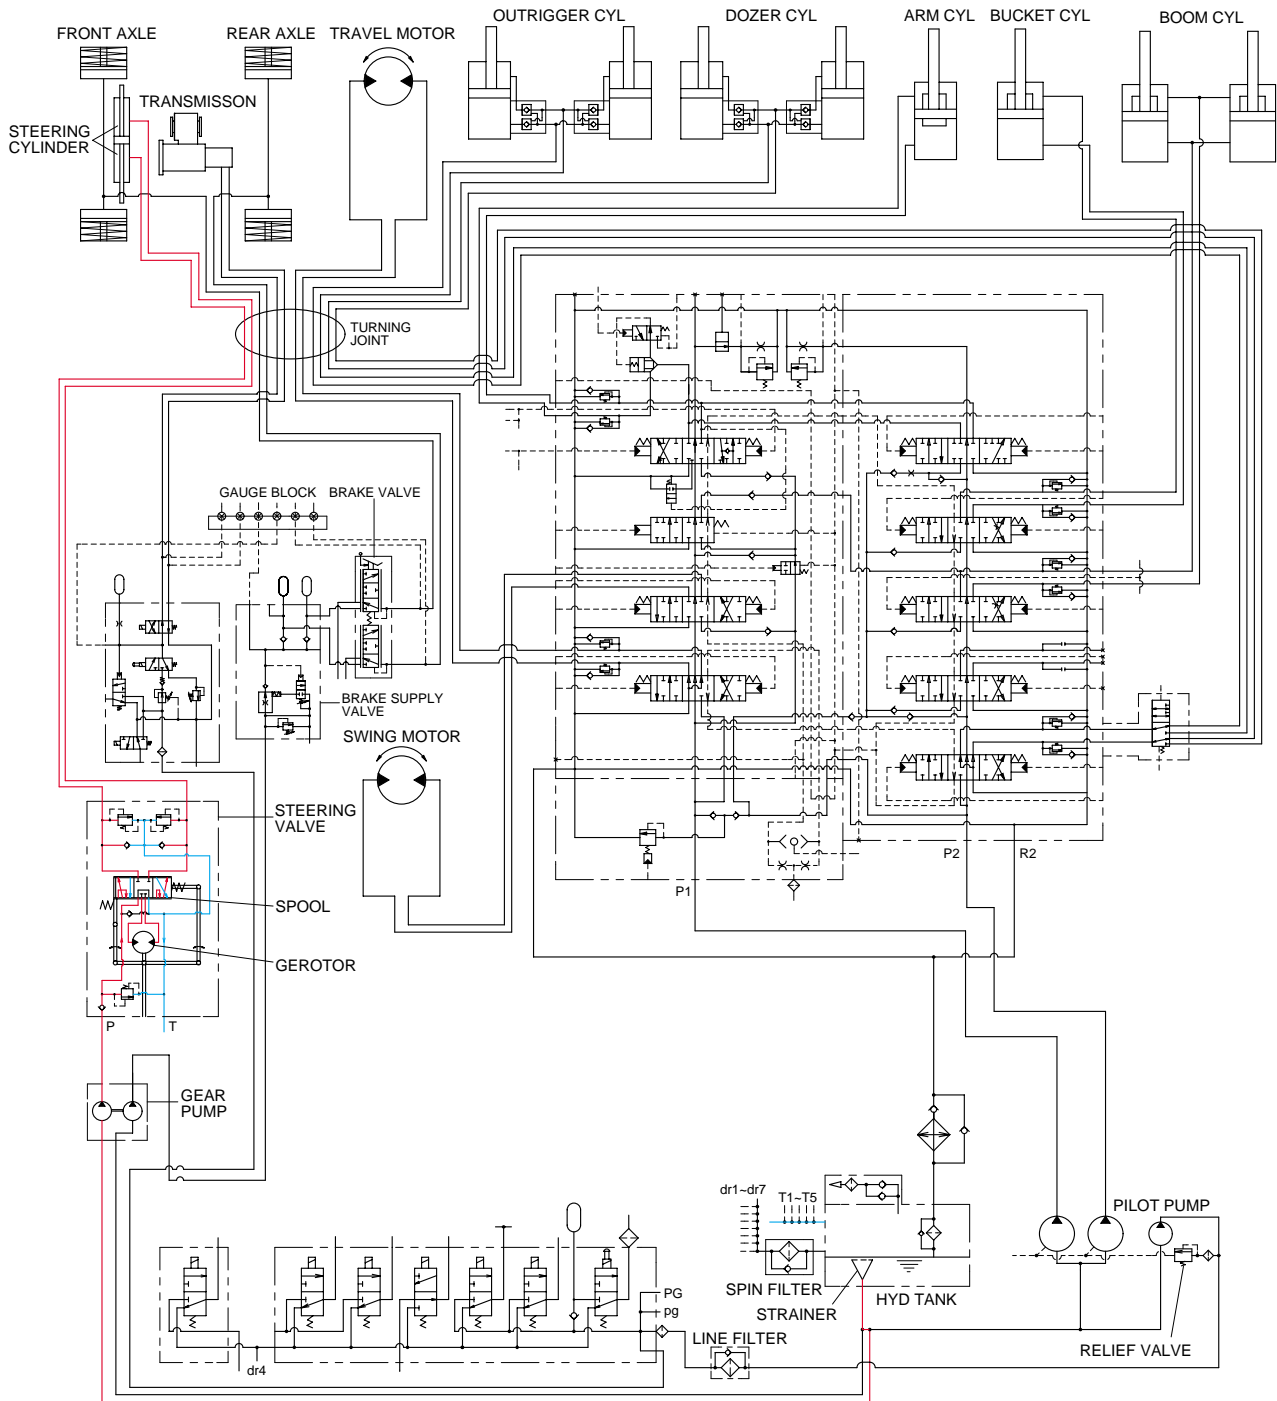


When the steering wheel is turned to the left or right, the spool within the steering valve turns left or right hand direction : Because the spool is connected with steering column.

At this time, the oil discharged from the gear pump flows into steering cylinder through spool and gerotor within the steering valve.

Then the steering direction is applied.



## 15. RAM LOCK CIRCUIT OPERATION

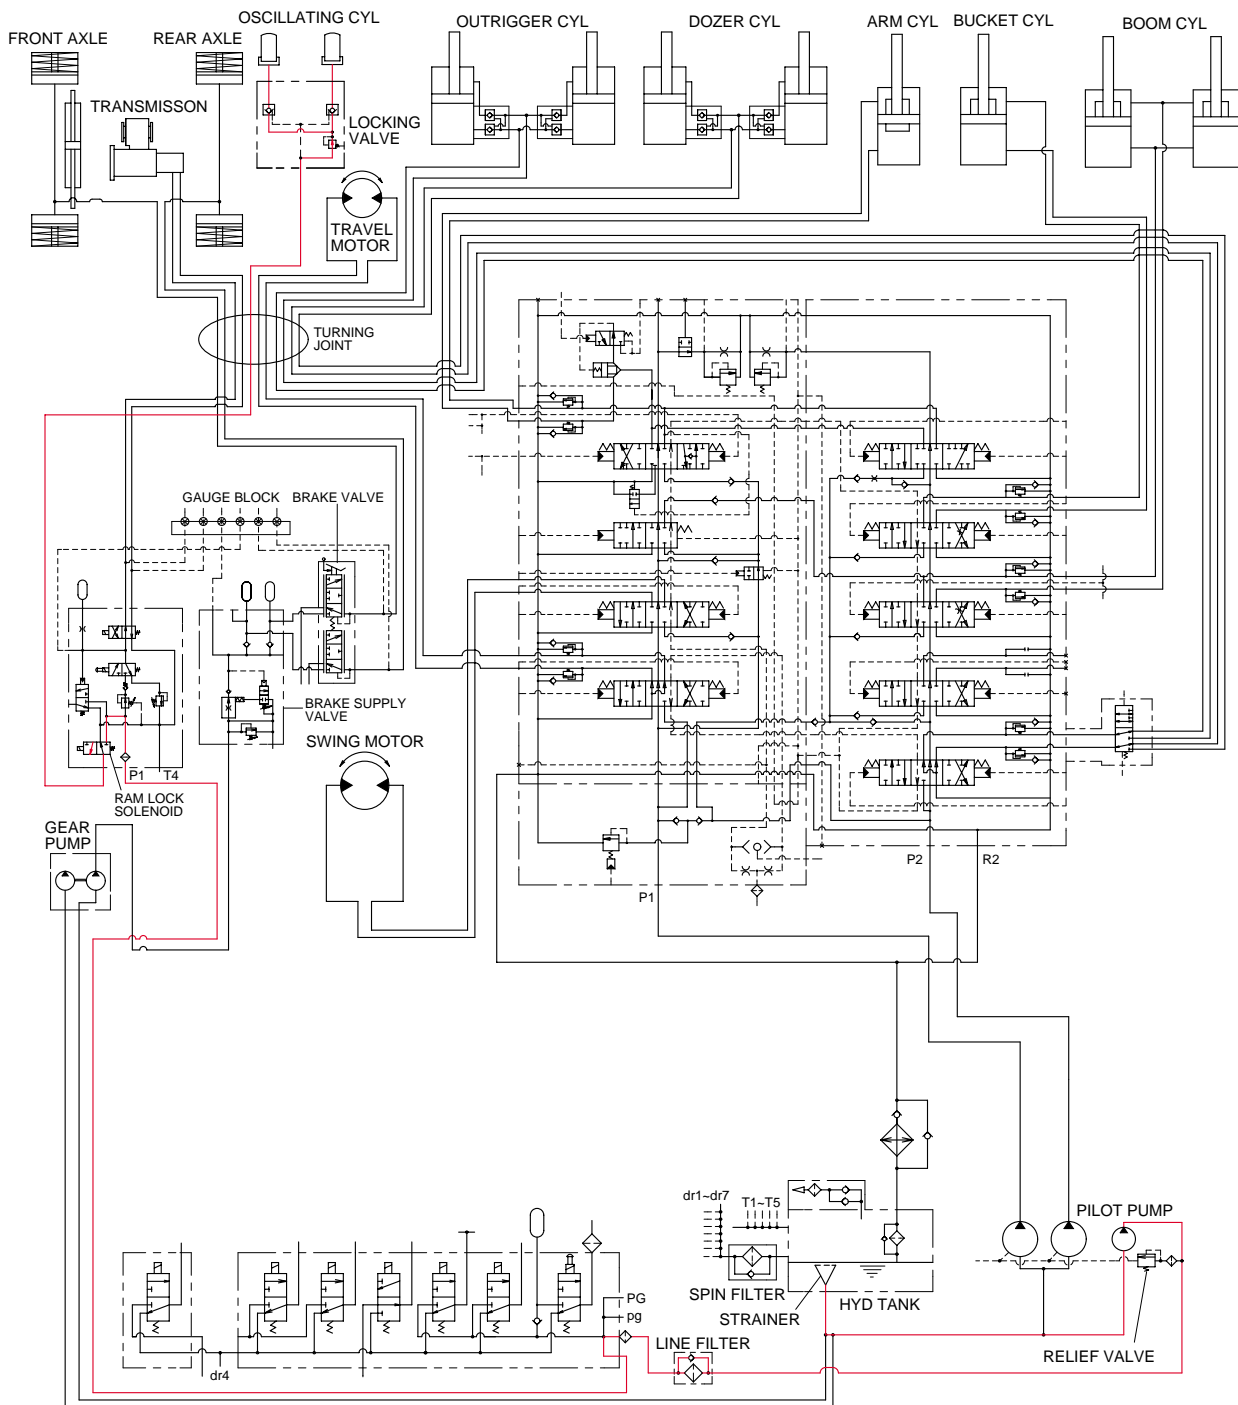

When the ram lock switch is selected, the ram lock solenoid is changed over.

Thus, the oil discharged from the pilot pump flows into oscillating cylinder through ram lock solenoid and locking valve.

This pressure is applied to check valve and oscillating cylinder, thus the oscillating function is operated(Ram lock released).