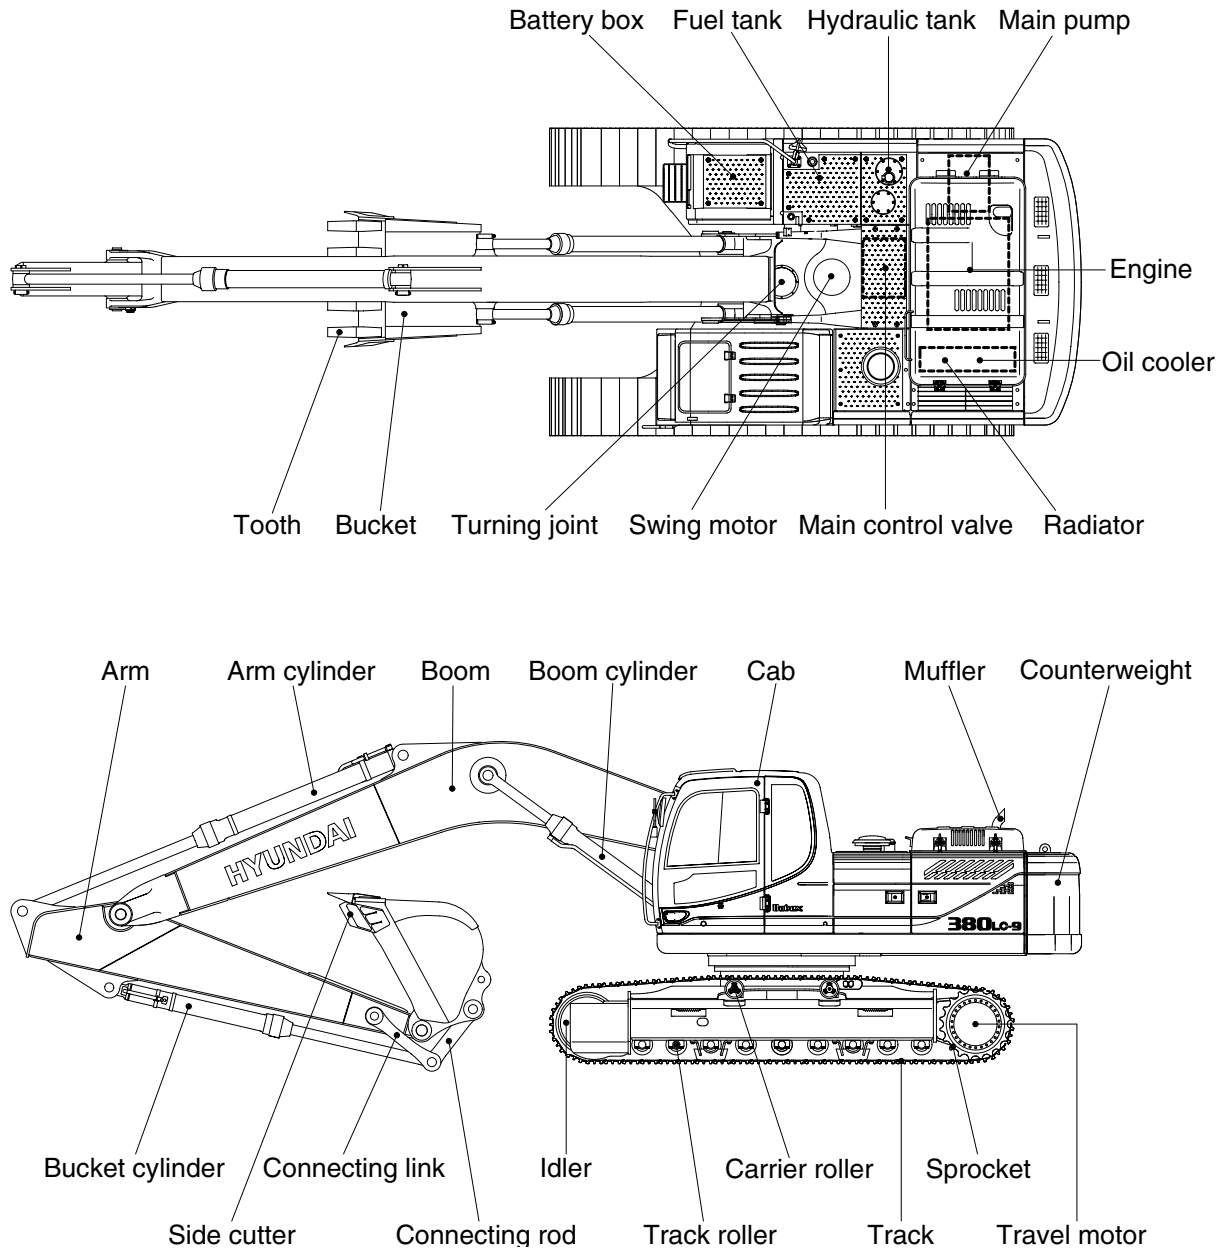


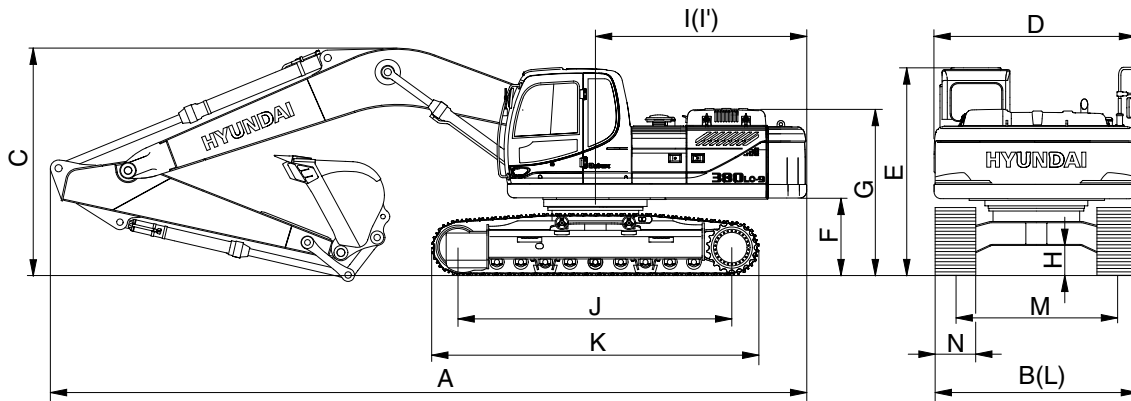
# GROUP 2 SPECIFICATIONS

## 1. MAJOR COMPONENT



38092SP01

## 2. SPECIFICATIONS

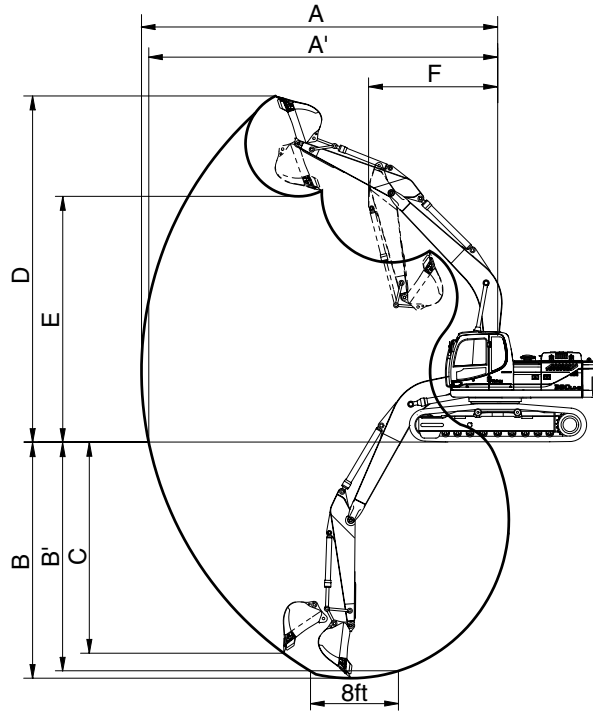


38092SP02

Description	Unit	Specification
Operating weight	kg (lb)	38200 (84220)
Bucket capacity (SAE heaped), standard	m <sup>3</sup> (yd <sup>3</sup> )	1.62 (2.12)
Overall length	A	11120 (36' 6")
Overall width, with 600 mm shoe	B	3340 (10'11")
Overall height	C	3450 (11' 4")
Superstructure width	D	2980 ( 9' 9")
Overall height of cab	E	3175 (10' 5")
Ground clearance of counterweight	F	1290 ( 4' 3")
Engine cover height	G	3190 (10' 6")
Minimum ground clearance	H	550 ( 1' 10")
Rear-end distance	I	3350 (11' 1")
Rear-end swing radius	I'	3415 (11' 2")
Distance between tumblers	J	4340 (14' 3")
Undercarriage length	K	5280 (17' 4")
Undercarriage width	L	3340 (11' 0")
Track gauge	M	2740 ( 9' 0")
Track shoe width, standard	N	600 (24")
Travel speed (low/high)	km/hr (mph)	3.0/4.8 (1.9/3.0)
Swing speed	rpm	9.3
Gradeability	Degree (%)	35 (70)
Ground pressure (600 mm shoe)	kgf/cm <sup>2</sup> (psi)	0.68 (9.67)
Max traction force	kg (lb)	32000 (70550)

### 3. WORKING RANGE

#### 1) 6.5 m (21' 4") BOOM

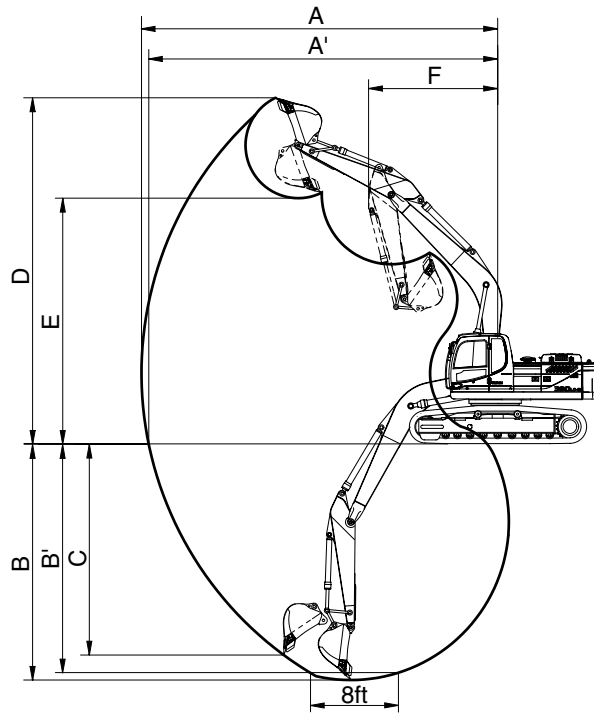


38092SP03

Description		2.5 m (8' 2") Arm	*3.2 m (10' 6") Arm	3.9 m (12' 10") Arm	4.3 m (14' 1") Arm
Max digging reach	A	10720 mm (35' 2")	11250 mm (36'11")	11870 mm (38'11")	12380 mm (40' 7")
Max digging reach on ground	A'	10490 mm (34' 5")	11040 mm (36' 3")	11670 mm (38' 3")	12180 mm (40' 0")
Max digging depth	B	6820 mm (22' 5")	7520 mm (24' 8")	8220 mm (27' 0")	8620 mm (28' 3")
Max digging depth (8ft level)	B'	6640 mm (21' 9")	7360 mm (24' 2")	8080 mm (26' 6")	8490 mm (27'10")
Max vertical wall digging depth	C	5930 mm (19' 5")	6330 mm (20' 9")	7040 mm (23' 1")	7540 mm (24' 9")
Max digging height	D	10590 mm (34' 9")	10570 mm (34' 8")	10800 mm (35' 5")	11360 mm (37' 3")
Max dumping height	E	7370 mm (24' 2")	7410 mm (24' 4")	7640 mm (25' 1")	8160 mm (26' 9")
Min swing radius	F	4530 mm (14'10")	4450 mm (14' 7")	4440 mm (14' 7")	4460 mm (14' 8")
Bucket digging force	SAE	201.0 [219.3] kN	201.0 [219.3] kN	201.0 [219.3] kN	201.0 [219.3] kN
		20500 [22360] kgf	20500 [22360] kgf	20500 [22360] kgf	20500 [22360] kgf
		45190 [49300] lbf	45190 [49300] lbf	45190 [49300] lbf	45190 [49300] lbf
	ISO	228.5 [249.3] kN	228.5 [249.3] kN	228.5 [249.3] kN	228.5 [249.3] kN
		23300 [25420] kgf	23300 [25420] kgf	23300 [25420] kgf	23300 [25420] kgf
		51370 [56040] lbf	51370 [56040] lbf	51370 [56040] lbf	51370 [56040] lbf
Arm crowd force	SAE	184.4 [201.1] kN	152.0 [165.8] kN	135.3 [147.6] kN	124.5 [135.9] kN
		18800 [20510] kgf	15500 [16910] kgf	13800 [15050] kgf	12700 [13850] kgf
		41450 [45220] lbf	34170 [37280] lbf	30420 [33190] lbf	28000 [30550] lbf
	ISO	192.2 [209.7] kN	156.9 [171.2] kN	139.3 [151.9] kN	128.5 [140.1] kN
		19600 [21380] kgf	16000 [17450] kgf	14200 [15490] kgf	13100 [14290] kgf
		43210 [47140] lbf	35270 [38480] lbf	31310 [34160] lbf	28880 [31510] lbf

[ ] : Power boost      \* : STD

· 6.15 m (20' 2") BOOM

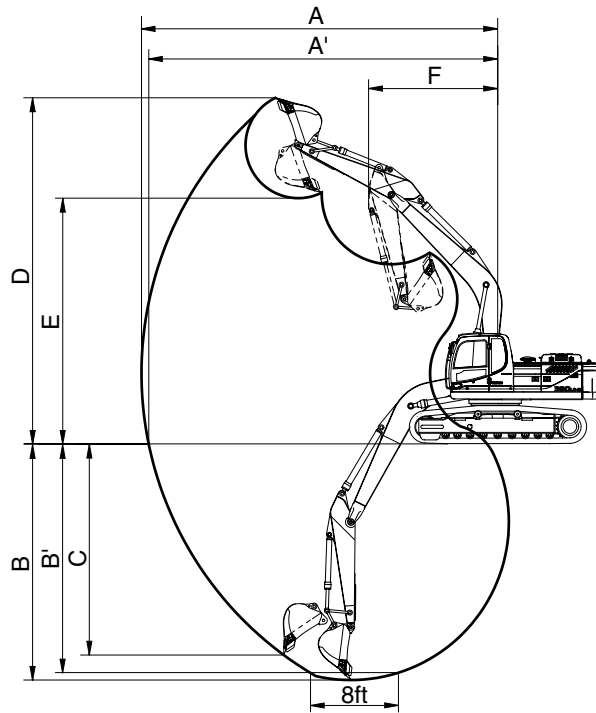


38092SP03

Description		2.5 m (8' 2") Arm	
Max digging reach	A	10330 mm (33'11")	
Max digging reach on ground	A'	10100 mm (33' 2")	
Max digging depth	B	6450 mm (21' 2")	
Max digging depth (8ft level)	B'	6270 mm (20' 7")	
Max vertical wall digging depth	C	5490 mm (18' 0")	
Max digging height	D	10320 mm (33'10")	
Max dumping height	E	7120 mm (23' 4")	
Min swing radius	F	4220 mm (13'10")	
Bucket digging force	SAE	201.0 [219.3] kN	
		20500 [22360] kgf	
		45190 [49300] lbf	
	ISO	228.5 [249.3] kN	
		23300 [25420] kgf	
		51370 [56040] lbf	
Arm crowd force	SAE	184.4 [201.1] kN	
		18800 [20510] kgf	
		41450 [45220] lbf	
	ISO	192.2 [209.7] kN	
		19600 [21380] kgf	
		43210 [47140] lbf	

[ ] : Power boost

• 8.3 m (28' 3") BOOM



38092SP03

Description		5.1 m (16' 9") Arm	
Max digging reach	A	15280 mm (50' 2")	
Max digging reach on ground	A'	15120 mm (49' 7")	
Max digging depth	B	11230 mm (36' 10")	
Max digging depth (8ft level)	B'	11120 mm (36' 6")	
Max vertical wall digging depth	C	10060 mm (33' 0")	
Max digging height	D	13350 mm (43' 10")	
Max dumping height	E	10150 mm (33' 4")	
Min swing radius	F	5900 mm (19' 4")	
Bucket digging force	SAE	201.0 [220.4] kN	
		20500 [22470] kgf	
		45190 [49550] lbf	
	ISO	228.5 [250.3] kN	
		23300 [25530] kgf	
		51370 [56280] lbf	
Arm crowd force	SAE	109.8 [119.8] kN	
		11200 [12220] kgf	
		24690 [26930] lbf	
	ISO	112.8 [123.0] kN	
		11500 [12550] kgf	
		25350 [27650] lbf	

[ ] : Power boost

















#### 4. WEIGHT

Item	R380LC-9		
	kg	lb	
Upperstructure assembly	15040	33160	
Main frame weld assembly	2995	6600	
Engine assembly	740	1630	
Main pump assembly	190	420	
Main control valve assembly	340	750	
Swing motor assembly	360	790	
Hydraulic oil tank assembly	340	750	
Fuel tank assembly	230	510	
Counterweight	6.5, 6.15 m boom	6500	14330
	8.6 m boom	8100	17860
Cab assembly	490	1080	
Lower chassis assembly	14310	31550	
Track frame weld assembly	5415	11940	
Swing bearing	590	1300	
Travel motor assembly	400	880	
Turning joint	65	140	
Track recoil spring and idler	270	600	
Idler	230	510	
Carrier roller	40	90	
Track roller	80	180	
Track-chain assembly (600 mm standard triple grouser shoe)	2420	5340	
Front attachment assembly (6.5 m boom, 3.2 m arm, 1.62 m <sup>3</sup> SAE heaped bucket)	7670	16910	
6.5 m boom assembly	2930	6460	
3.2 m arm assembly	1340	2950	
1.62 m <sup>3</sup> SAE heaped bucket	1280	2820	
Boom cylinder assembly	370	820	
Arm cylinder assembly	490	1080	
Bucket cylinder assembly	320	710	
Bucket control linkage assembly	370	820	

## 5. LIFTING CAPACITIES











1) 6.5 m (21' 4") boom, 3.2 m (10' 6") arm equipped with 1.62 m<sup>3</sup> (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 6500 kg (14330 lb) counterweight.

-  : Rating over-front
-  : Rating over-side or 360 degree
























Load point height		Load radius												At max. reach			
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		9.0 m (30.0 ft)		Capacity		Reach	
																	
9.0 m (30 ft)	kg														*5950	*5950	7.97 (26.1)
	lb														*13120	*13120	
7.5 m (25.0 ft)	kg								*4560	*4560					*6020	4820	9.12 (29.9)
	lb								*10050	*10050					*13270	10630	
6.0 m (20.0 ft)	kg								*6620	*6620					*6110	4010	9.87 (32.4)
	lb								*14590	*14590					*13470	8840	
4.5 m (15.0 ft)	kg						*8260	*8260	*7320	6530	*4450	*4450	*6190	3550	10.32 (33.9)		
	lb						*18210	*18210	*16140	14400	*9810	*9810	*13650	7830			
3.0 m (10.0 ft)	kg				*13520	*13520	*9960	8910	*8240	6150	*6360	4430	5940	3310	10.50 (34.4)		
	lb				*29810	*29810	*21960	19640	*18170	13560	*14020	9770	13100	7300			
1.5 m (5.0 ft)	kg				*16390	12870	*11570	8270	*9170	5790	*7510	4230	5890	3250	10.45 (34.3)		
	lb				*36130	28370	*25510	18230	*20220	12760	*16560	9330	12990	7170			
Ground Line	kg			*13090	*13090	*17880	12230	*12690	7820	*9880	5520	*7070	4090	6130	3380	10.14 (33.3)	
	lb			*28860	*28860	*39420	26960	*27980	17240	*21780	12170	*15590	9020	13510	7450		
-1.5 m (-5.0 ft)	kg	*13720	*13720	*17520	*17520	*18150	12020	*13170	7600	9750	5370			6730	3740	9.57 (31.4)	
	lb	*30250	*30250	*38620	*38620	*40010	26500	*29030	16760	21500	11840			14840	8250		
-3.0 m (-10.0 ft)	kg	*17880	*17880	*22800	*22800	*17430	12080	*12880	7580	9750	5370			*7730	4490	8.65 (28.4)	
	lb	*39420	*39420	*50270	*50270	*38430	26630	*28400	16710	21500	11840			*17040	9900		
-4.5 m (-15.0 ft)	kg	*22600	*22600	*21880	*21880	*15520	12390	*11510	7790					*7690	6200	7.25 (23.8)	
	lb	*49820	*49820	*48240	*48240	*34220	27320	*25380	17170					*16950	13670		
-6.0 m (-20.0 ft)	kg					*11410	*11410										
	lb					*25150	*25150										

- Note
1. Lifting capacity are based on SAE J1097 and ISO 10567.
  2. Lifting capacity of the ROBEX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
  3. The load point is a hook located on the back of the bucket.
  4. \*indicates load limited by hydraulic capacity.

(2) 6.15 m (20' 2") boom, 2.5 m (8' 2") arm equipped with 1.62 m<sup>3</sup> (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 6500 kg (14330 lb) counterweight.






Load point height		Load radius								At max. reach					
		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		Capacity		Reach			
												m (ft)			
9.0 m (30.0 ft)	kg												*7580	*7580	6.65
	lb												*16710	*16710	(21.8)
7.5 m (25.0 ft)	kg												*7420	6190	8.02
	lb												*16360	13650	(26.3)
6.0 m (20.0 ft)	kg							*8590	*8590	*6510	*6510		*7460	4980	8.88
	lb							*18940	*18940	*14350	*14350		*16450	10980	(29.1)
4.5 m (15.0 ft)	kg	*18270	*18270	*12170	*12170	*9790	9680	*8620	6560	*8620	6560	7480	4350	9.38	
	lb	*40280	*40280	*26830	*26830	*21580	21340	*19000	14460	*19000	14460	16490	9590	(30.8)	
3.0 m (10.0 ft)	kg			*15380	14190	*11300	9030	*9350	6250	*9350	6250	7050	4040	9.58	
	lb			*33910	31280	*24910	19910	*20610	13780	*20610	13780	15540	8910	(31.4)	
1.5 m (5.0 ft)	kg			*17740	13080	*12640	8450	*10060	5940	*10060	5940	7010	3980	9.52	
	lb			*39110	28840	*27870	18630	*22180	13100	*22180	13100	15450	8770	(31.2)	
Ground Line	kg	*13400	*13400	*18580	12560	*13410	8060	10120	5710	10120	5710	7360	4170	9.19	
	lb	*29540	*29540	*40960	27690	*29560	17770	22310	12590	22310	12590	16230	9190	(30.2)	
-1.5 m (-5.0 ft)	kg	*21020	*21020	*18170	12420	*13400	7880	10010	5610	10010	5610	8290	4710	8.53	
	lb	*46340	*46340	*40060	27380	*29540	17370	22070	12370	22070	12370	18280	10380	(28.0)	
-3.0 m (-10 ft)	kg	*22960	*22960	*16580	12540	*12330	7930					*8180	5950	7.47	
	lb	*50620	*50620	*36550	27650	*27180	17480					*18030	13120	(24.5)	
-1.5 m (-10 ft)	kg	*17870	*17870	*13110	12970										
	lb	*39400	*39400	*28900	28590										

(3) 8.6 m (28' 3") boom, 5.1 m (16' 9") arm equipped with 1.46 m<sup>3</sup> (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 8100 kg (17860 lb) counterweight.

Load point height		Load radius																At max. reach								
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		9.0 m (30.0 ft)		10.5 m (35.0 ft)		12.0 m (40.0 ft)		13.5 m (45.0 ft)		Capacity		Reach				
																									m (ft)	
9.0 m (30 ft)	kg																							*3030	2510	12.91
	lb																							*6680	5530	(42.4)
7.5 m (25.0 ft)	kg																							*3110	2100	13.61
	lb																							*6830	4630	(44.7)
6.0 m (20.0 ft)	kg																							*3180	1820	14.10
	lb																							*7010	4010	(46.3)
4.5 m (15.0 ft)	kg																							*3290	1640	14.40
	lb																							*7250	3620	(47.2)
3.0 m (10.0 ft)	kg																							*3310	1530	14.53
	lb																							*7300	3370	(47.7)
1.5 m (5.0 ft)	kg																							*3270	1480	14.49
	lb																							*7210	3260	(47.5)
Ground Line	kg																							*3320	1500	14.28
	lb																							*7320	3310	(46.9)
-1.5 m (-5.0 ft)	kg																							*3470	1590	13.90
	lb																							*7650	3510	(45.6)
-3.0 m (-10.0 ft)	kg	*8910	*8910	*10270	*10270	*13880	11160	*11250	6900	*8540	4800	*6780	3530	5420	2670	4340	2060						*3760	1770	13.31	
	lb	*19640	*19640	*22640	*22640	*30600	24600	*24800	15210	*18830	10580	*14950	7780	11950	5890	9570	4540						*8290	3900	(43.7)	
-4.5 m (-15.0 ft)	kg	*11090	*11090	*12810	*12810	*15320	11300	*11200	6910	*8610	4760	*6850	3490	5400	2660								*4230	2080	12.50	
	lb	*24450	*24450	*28240	*28240	*33770	24910	*24690	15230	*18980	10490	*15100	7690	11900	5860								*9330	4590	(41.0)	
-6.0 m (-20.0 ft)	kg	*13540	*13540	*15800	*15800	*14460	11590	*10750	7050	*8340	4850	*6630	3570	*5260	2770								*4390	2610	11.41	
	lb	*29850	*29850	*34830	*34830	*31880	25550	*23700	15540	*18390	10690	*14620	7870	*11600	6110								*9680	5750	(37.4)	
-7.5 m (-25.0 ft)	kg	*16440	*16440	*18490	*18490	*12970	12050	*9770	7350	*7580	5080	*5850	3790										*4450	3570	9.94	
	lb	*36240	*36240	*40760	*40760	*28590	26570	*21540	16200	*16710	11200	*12900	8360										*9810	7870	(32.6)	
-9.0 m (-30.0 ft)	kg			*14620	*14620	*10500	*10500	*7900	7870	*5800	5550															
	lb			*32230	*32230	*23150	*23150	*17420	17350	*12790	12240															

## 6. BUCKET SELECTION GUIDE


### 1) GENERAL BUCKET

				
1.46 m <sup>3</sup> SAE heaped bucket	※ 1.62 m <sup>3</sup> SAE heaped bucket	1.86 m <sup>3</sup> SAE heaped bucket	2.10 m <sup>3</sup> SAE heaped bucket	2.32 m <sup>3</sup> SAE heaped bucket

Capacity		Width		Weight	Recommendation					
					6.5 m (21' 4") boom				6.15 m (20' 2") boom	8.6 m (28' 3") boom
SAE heaped	CECE heaped	Without side cutter	With side cutter		2.5 m arm (8' 2")	3.2 m arm (10' 6")	3.9 m arm (12' 10")	4.3 m arm (14' 1")	2.5 m arm (8' 2")	5.1 m arm (16' 9")
1.46 m <sup>3</sup> (1.91 yd <sup>3</sup> )	1.27 m <sup>3</sup> (1.66 yd <sup>3</sup> )	1380 mm (54.3")	1510 mm (59.4")	1170 kg (2580 lb)						
※ 1.62 m <sup>3</sup> (2.12 yd <sup>3</sup> )	1.40 m <sup>3</sup> (1.83 yd <sup>3</sup> )	1440 mm (56.7")	1570 mm (61.8")	1280 kg (2820 lb)						
1.86 m <sup>3</sup> (2.43 yd <sup>3</sup> )	1.60 m <sup>3</sup> (2.1 yd <sup>3</sup> )	1620 mm (63.8")	1750 mm (68.9")	1390 kg (3060 lb)						
2.10 m <sup>3</sup> (2.75 yd <sup>3</sup> )	1.80 m <sup>3</sup> (2.4 yd <sup>3</sup> )	1810 mm (71.3")	1940 mm (76.4")	1520 kg (3350 lb)						
2.32 m <sup>3</sup> (3.03 yd <sup>3</sup> )	2.00 m <sup>3</sup> (2.62 yd <sup>3</sup> )	1990 mm (78.3")	2120 mm (83.5")	1760 kg (3880 lb)						



※ : Standard bucket

 Applicable for materials with density of 2000 kg/m<sup>3</sup> (3370 lb/yd<sup>3</sup>) or less

 Applicable for materials with density of 1600 kg/m<sup>3</sup> (2700 lb/yd<sup>3</sup>) or less

 Applicable for materials with density of 1100 kg/m<sup>3</sup> (1850 lb/yd<sup>3</sup>) or less

## 2) HEAVY DUTY AND ROCK-HEAVY DUTY BUCKET

	
<p>◆ 1.62 m<sup>3</sup> SAE heaped bucket</p>	<p>◎ 1.44 m<sup>3</sup>, 1.62 m<sup>3</sup>, 1.86 m<sup>3</sup> SAE heaped bucket</p>

Capacity		Width		Weight	Recommendation				
					6.5 m (21' 4") boom				6.15 m (20' 2") boom
SAE heaped	CECE heaped	Without side cutter	With side cutter		2.5 m arm (8' 2")	3.2 m arm (10' 6")	3.9 m arm (12' 10")	4.3 m arm (14' 1")	2.5 m arm (8' 2")
◆ 1.62 m <sup>3</sup> (2.12 yd <sup>3</sup> )	1.40 m <sup>3</sup> (1.83 yd <sup>3</sup> )	1540 mm (60.6")	-	1570 kg (3460 lb)					
◎ 1.44 m <sup>3</sup> (1.88 yd <sup>3</sup> )	1.27 m <sup>3</sup> (1.66 yd <sup>3</sup> )	1280 mm (50.4")	-	1565 kg (3450 lb)					
◎ 1.62 m <sup>3</sup> (2.12 yd <sup>3</sup> )	1.40 m <sup>3</sup> (1.83 yd <sup>3</sup> )	1545 mm (60.8")	-	1610 kg (3550 lb)					
◎ 1.86 m <sup>3</sup> (2.43 yd <sup>3</sup> )	1.60 m <sup>3</sup> (2.1 yd <sup>3</sup> )	1725 mm (67.9")	-	1710 kg (3770 lb)					

◆ : Heavy duty bucket

◎ : Rock-heavy duty bucket

Applicable for materials with density of 2000 kg/m<sup>3</sup> (3370 lb/yd<sup>3</sup>) or less

Applicable for materials with density of 1600 kg/m<sup>3</sup> (2700 lb/yd<sup>3</sup>) or less


Applicable for materials with density of 1100 kg/m<sup>3</sup> (1850 lb/yd<sup>3</sup>) or less

## 7. UNDERCARRIAGE

### 1) TRACKS

X-leg type center frame is integrally welded with reinforced box-section track frames. The design includes dry tracks, lubricated rollers, idlers, sprockets, hydraulic track adjusters with shock absorbing springs and assembled track-type tractor shoes with triple grousers.

### 2) TYPES OF SHOES

Model	Shapes		Triple grouser				
							
R380LC-9	Shoe width	mm (in)	600 (24)	700 (28)	750 (30)	800 (32)	900 (36)
	Operating weight	kg (lb)	38200 (84220)	38650 (85210)	38875 (85700)	39100 (86200)	39550 (87190)
	Ground pressure	kgf/cm <sup>2</sup> (psi)	0.68 (9.67)	0.59 (8.39)	0.56 (7.96)	0.52 (7.39)	0.47 (6.68)
	Overall width	mm (ft-in)	3340 (10' 11")	3440 (11' 3")	3490 (11' 5")	3540 (11' 7")	3640 (11' 11")

### 3) NUMBER OF ROLLERS AND SHOES ON EACH SIDE

Item	Quantity
Carrier rollers	2 EA
Track rollers	9 EA
Track shoes	51 EA

#### 4) SELECTION OF TRACK SHOE

Suitable track shoes should be selected according to operating conditions.

##### Method of selecting shoes

Confirm the category from the list of applications in **table 2**, then use **table 1** to select the shoe. Wide shoes (categories B and C) have limitations on applications. Before using wide shoes, check the precautions, then investigate and study the operating conditions to confirm if these shoes are suitable.

Select the narrowest shoe possible to meet the required flotation and ground pressure. Application of wider shoes than recommendations will cause unexpected problem such as bending of shoes, crack of link, breakage of pin, loosening of shoe bolts and the other various problems.

※ **Table 1**

Track shoe	Specification	Category
600 mm triple grouser	Standard	A
700 mm triple grouser	Option	B
750 mm triple grouser	Option	B
800 mm triple grouser	Option	C
900 mm triple grouser	Option	C

※ **Table 2**

Category	Applications	Applications
A	Rocky ground, river beds, normal soil	<ul style="list-style-type: none"> <li>Travel at low speed on rough ground with large obstacles such as boulders or fallen trees</li> </ul>
B	Normal soil, soft ground	<ul style="list-style-type: none"> <li>These shoes cannot be used on rough ground with large obstacles such as boulders or fallen trees</li> <li>Travel at high speed only on flat ground</li> <li>Travel slowly at low speed if it is impossible to avoid going over obstacles</li> </ul>
C	Extremely soft ground (swampy ground)	<ul style="list-style-type: none"> <li>Use the shoes only in the conditions that the machine sinks and it is impossible to use the shoes of category A or B</li> <li>These shoes cannot be used on rough ground with large obstacles such as boulders or fallen trees</li> <li>Travel at high speed only on flat ground</li> <li>Travel slowly at low speed if it is impossible to avoid going over obstacles</li> </ul>

## 8. SPECIFICATIONS FOR MAJOR COMPONENTS

### 1) ENGINE

Item	Specification
Model	Cummins QSL
Type	4-cycle turbocharged charger air cooled diesel engine
Cooling method	Water cooling
Number of cylinders and arrangement	6 cylinders, in-line
Firing order	1-5-3-6-2-4
Combustion chamber type	Direct injection type
Cylinder bore × stroke	114 × 145 mm (4.49" × 5.70")
Piston displacement	8900 cc (540 cu in)
Compression ratio	17.8 : 1
Rated gross horse power (SAE J1995)	296 Hp at 1850 rpm (221 kW at 1850 rpm)
Maximum torque	148 kgf · m (1070 lbf · ft) at 1400 rpm
Engine oil quantity	31.7 l (8.4 U.S. gal)
Dry weight	740 kg (1630 lb)
Low idling speed	800 ± 100 rpm
High idling speed	1700 + 50 rpm
Rated fuel consumption	164.8 g/Hp · hr at 1850 rpm
Starting motor	Denso (24V-7.5 kW)
Alternator	Delco Remy 24V-50A
Battery	2 × 12V × 160Ah

### 2) MAIN PUMP

Item	Specification
Type	Variable displacement tandem axis piston pumps
Capacity	2 × 175 cc/rev
Maximum pressure	330 kgf/cm <sup>2</sup> (4690 psi) [360 kgf/cm <sup>2</sup> (5120 psi)]
Rated oil flow	2 × 306 l /min (80.8 U.S. gpm / 67.3 U.K. gpm)
Rated speed	1750 rpm

[ ]: Power boost

### 3) GEAR PUMP

Item	Specification
Type	Fixed displacement gear pump single stage
Capacity	15cc/rev
Maximum pressure	40 kgf/cm <sup>2</sup> (570 psi)
Rated oil flow	27 l /min (7.1 U.S. gpm/5.9 U.K. gpm)

### 4) MAIN CONTROL VALVE

Item	Specification
Type	9 spools
Operating method	Hydraulic pilot system
Main relief valve pressure	330 kgf/cm <sup>2</sup> (4690 psi) [360 kgf/cm <sup>2</sup> (5120 psi)]
Overload relief valve pressure	390 kgf/cm <sup>2</sup> (5550 psi)

[ ]: Power boost

### 5) SWING MOTOR

Item	Specification
Type	Axial piston motor
Capacity	233 cc/rev
Relief pressure	290 kgf/cm <sup>2</sup> (4120 psi)
Braking system	Automatic, spring applied hydraulic released
Braking torque	107 kgf · m (773 lbf · ft)
Brake release pressure	30~50 kgf/cm <sup>2</sup> (427~711 psi)
Reduction gear type	2 - stage planetary

### 6) TRAVEL MOTOR

Item	Specification
Type	Variable displacement axial piston motor
Relief pressure	360 kgf/cm <sup>2</sup> (5120 psi)
Capacity (max / min)	114.2/185.2 cc/rev
Reduction gear type	3-stage planetary
Braking system	Automatic, spring applied hydraulic released
Brake release pressure	8.5 kgf/cm <sup>2</sup> (121 psi)
Braking torque	44.4 kgf · m (321 lbf · ft)

## 7) CYLINDER

Item		Specification
Boom cylinder	Bore dia × Rod dia × Stroke	∅ 160 × ∅ 110 × 1500 mm
	Cushion	Extend only
Arm cylinder	Bore dia × Rod dia × Stroke	∅ 170 × ∅ 120 × 1760 mm
	Cushion	Extend and retract
Bucket cylinder	Bore dia × Rod dia × Stroke	∅ 150 × ∅ 105 × 1295 mm
	Cushion	Extend only

※ Discoloration of cylinder rod can occur when the friction reduction additive of lubrication oil spreads on the rod surface.

※ Discoloration does not cause any harmful effect on the cylinder performance.

## 8) SHOE

Item		Width	Ground pressure	Link quantity	Overall width
R380LC-9	Standard	600 mm (24")	0.68 kgf/cm <sup>2</sup> (9.67 psi)	51	3340 mm (10' 11")
	Option	700 mm (28")	0.59 kgf/cm <sup>2</sup> (8.39 psi)	51	3440 mm (11' 3")
		750 mm (30")	0.56 kgf/cm <sup>2</sup> (7.96 psi)	51	3490 mm (11' 5")
		800 mm (32")	0.52 kgf/cm <sup>2</sup> (7.39 psi)	51	3540 mm (11' 7")
		900 mm (36")	0.47 kgf/cm <sup>2</sup> (6.68 psi)	51	3640 mm (11' 11")

## 9) BUCKET

Item		Capacity		Tooth quantity	Width		
		SAE heaped	CECE heaped		Without side cutter	With side cutter	
R380LC-9	Standard	1.62 m <sup>3</sup> (2.12 yd <sup>3</sup> )	1.40 m <sup>3</sup> (1.8 yd <sup>3</sup> )	5	1440 mm (56.7")	1570 mm (61.8")	
			1.46 m <sup>3</sup> (1.91 yd <sup>3</sup> )	1.27 m <sup>3</sup> (1.66 yd <sup>3</sup> )	4	1380 mm (54.3")	1510 mm (59.4")
		◆	1.62 m <sup>3</sup> (2.12 yd <sup>3</sup> )	1.40 m <sup>3</sup> (1.83 yd <sup>3</sup> )	5	1540 mm (60.6")	-
		◎	1.44 m <sup>3</sup> (1.88 yd <sup>3</sup> )	1.27 m <sup>3</sup> (1.66 yd <sup>3</sup> )	5	1280 mm (50.4")	-
		◎	1.62 m <sup>3</sup> (2.12 yd <sup>3</sup> )	1.40 m <sup>3</sup> (1.83 yd <sup>3</sup> )	5	1545 mm (60.8")	-
		◎	1.86 m <sup>3</sup> (2.43 yd <sup>3</sup> )	1.60 m <sup>3</sup> (2.1 yd <sup>3</sup> )	5	1725 mm (67.9")	-
			1.86 m <sup>3</sup> (2.43 yd <sup>3</sup> )	1.60 m <sup>3</sup> (2.1 yd <sup>3</sup> )	5	1620 mm (63.8")	1750 mm (68.9")
			2.10 m <sup>3</sup> (2.75 yd <sup>3</sup> )	1.80 m <sup>3</sup> (2.4 yd <sup>3</sup> )	6	1810 mm (71.3")	1940 mm (76.4")
			2.32 m <sup>3</sup> (3.03 yd <sup>3</sup> )	2.00 m <sup>3</sup> (2.62 yd <sup>3</sup> )	6	1990 mm (78.3")	2120 mm (83.5")

◆ : Heavy duty bucket

◎ : Rock bucket (esco type)

## 9. RECOMMENDED OILS

Use only oils listed below or equivalent.

Do not mix different brand oil.

Service point	Kind of fluid	Capacity l (U.S. gal)	Ambient temperature °C ( °F)					
			-20 (-4)	-10 (14)	0 (32)	10 (50)	20 (68)	30 (86)
Engine oil pan	Engine oil	33.5 (8.8)	SAE 30					
			SAE 10W					
			SAE 10W-30					
						SAE 15W-40		
Swing drive	Gear oil	8.0 (2.1)	SAE 85W-140					
Final drive		7.0×2 (1.8×2)						
Hydraulic tank	Hydraulic oil	Tank: 210 (55.5)	ISO VG 32					
		System: 415 (110)				ISO VG 46		
						ISO VG 68		
Fuel tank	Diesel fuel	550 (145)	ASTM D975 NO.1					
						ASTM D975 NO.2		
Fitting (Grease nipple)	Grease	As required	NLGI NO.1					
						NLGI NO.2		
Radiator (Reservoir tank)	Mixture of antifreeze and water 50 : 50	50 (13.2)	Ethylene glycol base permanent type					

**SAE** : Society of Automotive Engineers

**API** : American Petroleum Institute

**ISO** : International Organization for Standardization

**NLGI** : National Lubricating Grease Institute

**ASTM** : American Society of Testing and Material