
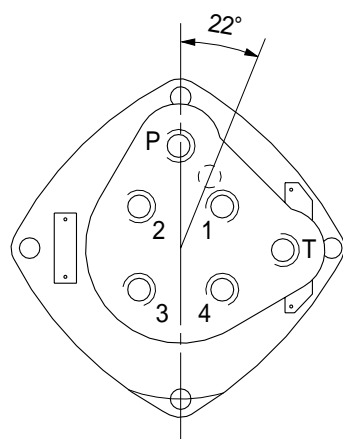
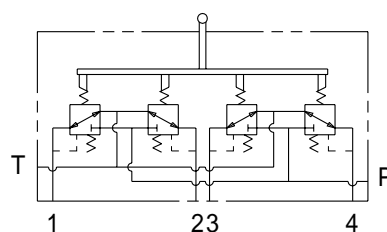


GROUP 5 RCV LEVER

1. STRUCTURE

The casing has the oil inlet port P(primary pressure) and the oil outlet port T(tank). In addition the secondary pressure is taken out through ports 1, 2, 3 and 4 provided at the bottom face.

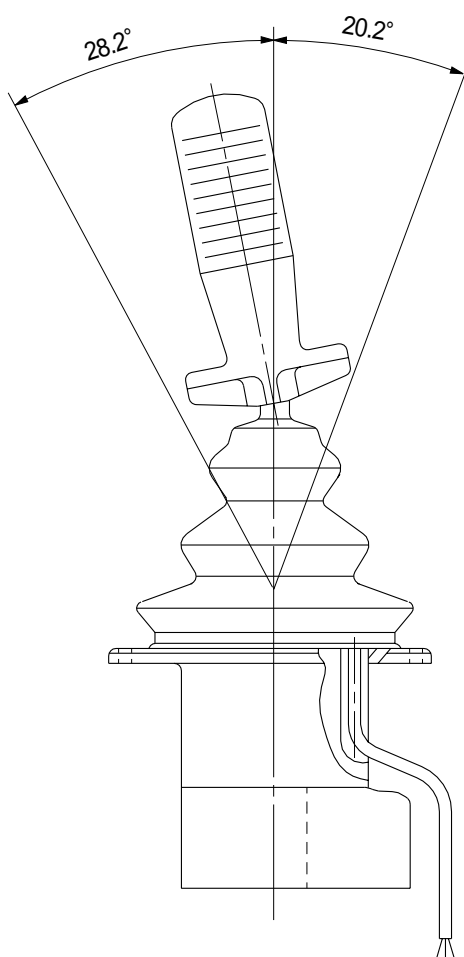

Port	LH	RH	Port size
P	Pilot inlet port	Pilot inlet port	PF1/4
T	Pilot return port	Pilot return port	
1	Left swing port	Bucket out port	
2	Right swing port	Bucket in port	
3	Arm in port	Boom down port	
4	Arm out port	Boom up port	

CROSS SECTION

The construction of the pilot valve is shown in the attached cross section drawing. The casing has vertical holes in which reducing valves are assembled.


The pressure reducing section is composed of the spool, spring for setting secondary pressure, return spring(308), locking disc(305), spring retainer(306) and shims(309). The spring for setting the secondary pressure has been generally so preset that the secondary pressure is 5 to 19 kgf/cm² (depending on the type). The spool is pushed against the full plunger(304) by the return spring.

When the push rod is pushed down by tilting the handle, the spring seat comes down simultaneously and changes setting of the secondary pressure spring.

In case of the two point type electric switch is fitted, as shown in the attached cross section drawing, the pusher(103), rocker arm(104) and electrical contact(107) are built in the inside of the handle(101). When the center of the handle cap(102) provided at the handle head is pushed, the roller is come down, and the switch lever contacted with the roller tilts to make the switch function. The electrical cable(121), connected to the switch, is led through the handle section and casing to the outside.

101	Handle	115	Nut	207	Screw
102	Cap	116	Bellows	301	Plunger guide
103	Pusher	117	Switch plate	302	Seal
104	Rocker arm	118	Cardan	303	Seal
105	Spacer	119	Retaining plate	304	Full plunger
106	Spacer	121	Electrical cable	305	Locking disc
107	Electrical contact	128	Screw	306	Spring retainer
109	Screw	201	Upper housing	307	Regulating spring
110	Nut	202	Lower housing	308	Return spring
111	Screw	203	Pin	309	Shims
112	Washer	204	O-ring	310	Piston
113	Hollow lever	205	O-ring		
114	Lock nut	206	O-ring		

CROSS SECTION

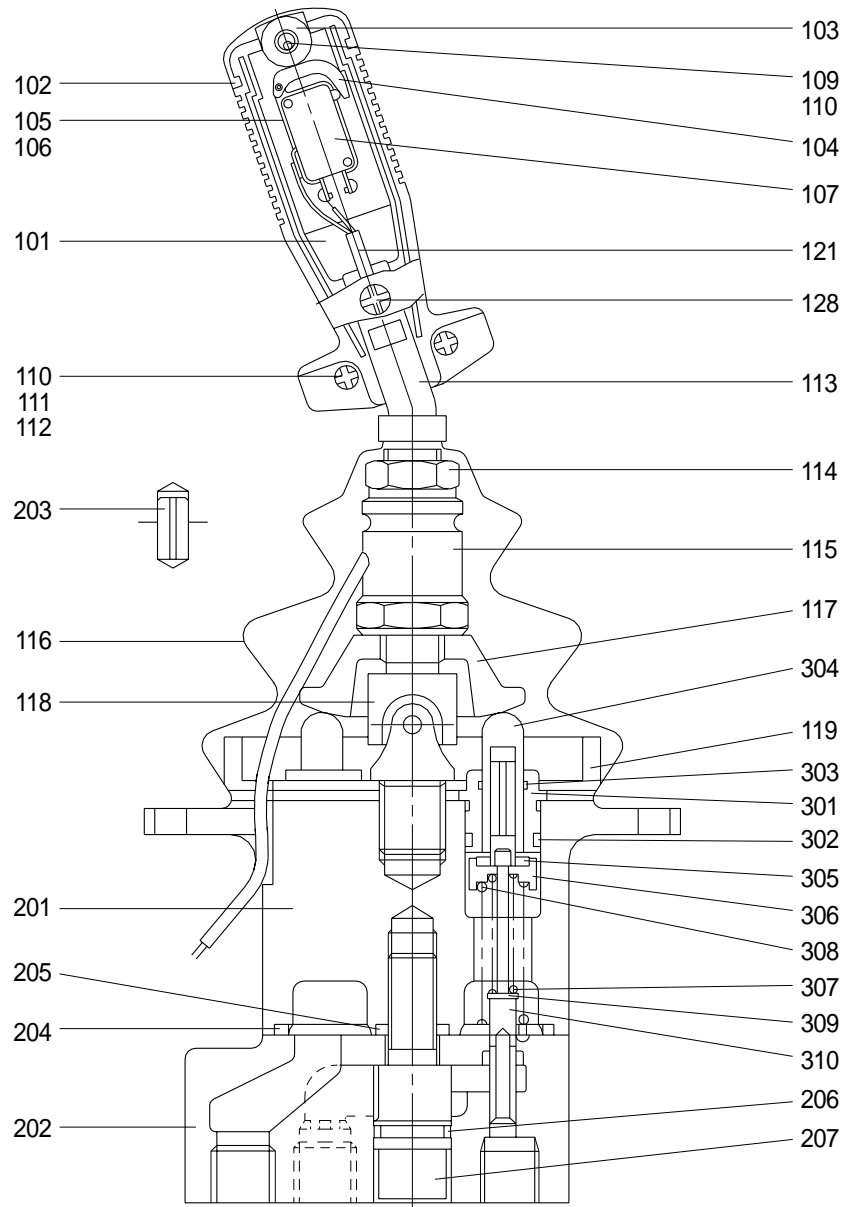

2. FUNCTION

1) FUNDAMENTAL FUNCTIONS

The pilot valve is a valve that controls the spool stroke, direction, etc of a main control valve. This function is carried out by providing the spring at one end of the main control valve spool and applying the output pressure(=secondary pressure) of the pilot valve to the other end.

For this function to be carried out satisfactorily, the pilot valve is composed of the following elements.

- (1) Inlet port(P) where oil is supplied from hydraulic pump.
- (2) Output ports(1,2,3 & 4) to apply pressure supplied from inlet port to ends of control valve spools.
- (3) Tank port(T) necessary to control the above output pressure.
- (4) Spool to connect output port to inlet port or tank port.
- (5) Mechanical means to control output pressure, including springs that work on the above spools.

2) FUNCTIONS OF MAJOR SECTIONS

The functions of the spool are to receive the supply oil pressure from the hydraulic pump at its port P, and to change over oil paths to determine whether the pressure oil of port P is led to output ports 1,2,3 & 4 or the output port pressure oil to tank port T.

The spring works on this spool to determine the output pressure.

The change the deflection of this spring, the push rod is inserted and can slide in the plug.

For the purpose of changing the displacement of the push rod through the plate and adjusting nut are provided the handle that can be tilted in any direction around the fulcrum of the universal joint center.


The spring works on the casing and spring seat and tries to return the push rod to the zero-displacement position irrespective of the output pressure, securing its resetting to the center position.

This also has the effect of a reaction spring to give appropriate control feeling to the operator.

3) OPERATION

The operation of the pilot valve will be described on the basis of the hydraulic circuit diagram shown below and the attached operation explanation drawing.

The diagram shown below is the typical application example of the pilot valve.

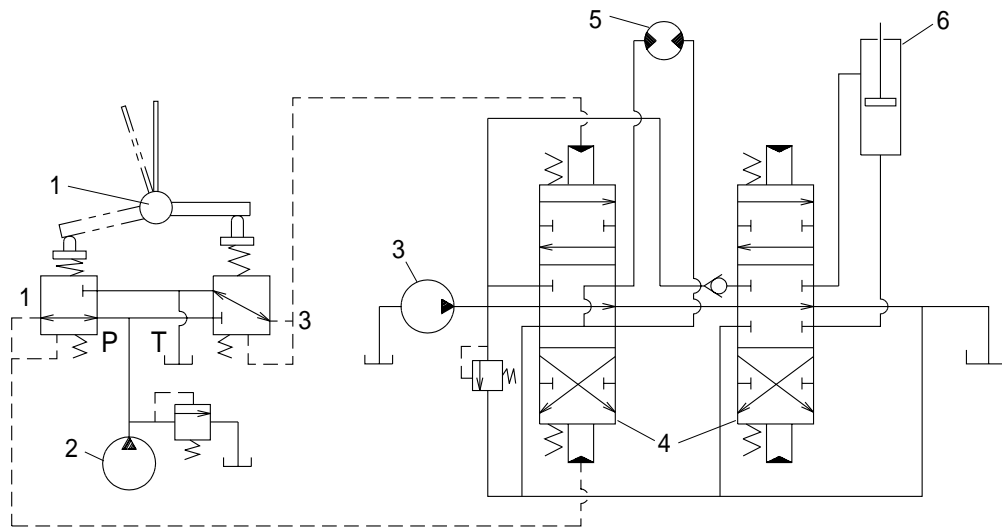


- 1 Pilot valve
- 2 Pilot pump

- 3 Main pump
- 4 Main control valve

- 5 Hydraulic motor
- 6 Hydraulic cylinder


(1) At neutral position

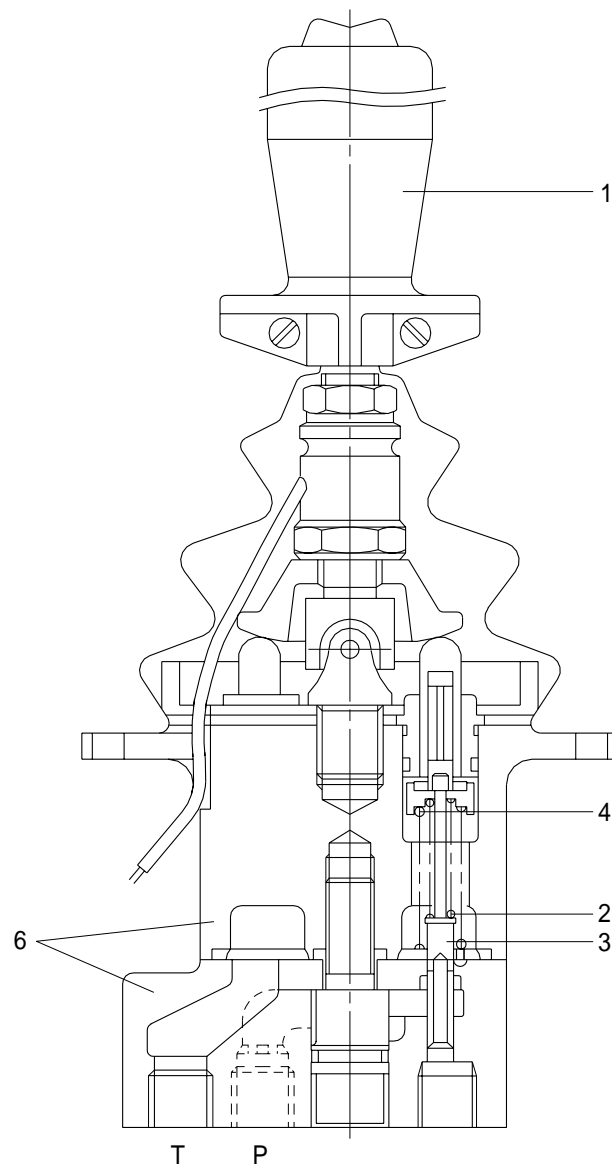

When the lever(1) is not operated, the force of the regulating spring(2) that determines the output pressure of the pilot valve is not applied to the regulating spool(3).

If the lever is held in zero position by the return spring(4), the output port is connected to tank port T only and the output pressure becomes equal to tank pressure.

(2) When handle is tilted

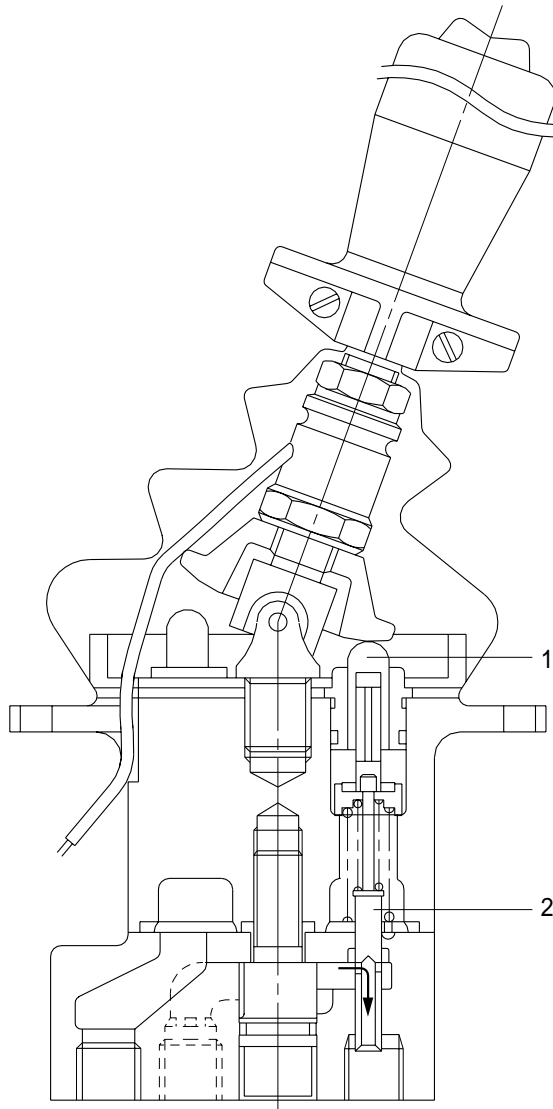

When the plunger(1) is stroked, the spool(2) moves downwards.

Then port P is connected with port 1, and the oil supplied from the pilot pump flows through port 1 to generate the pressure.

When the pressure at port 1 increases to the value corresponding to the spring force set by tilting the handle, the hydraulic pressure force balances with the spring force. If the pressure at port 1 increases higher than the set pressure, port P is disconnected from port 1 and port T is connected with port 1. If it decreases lower than the set pressure, port P is connected with port 1 and port T is disconnected from port 1.

In this manner the secondary pressure is kept at the constant value.

Besides, in some type, when the lever (handle) is tilted more than a certain angle, the upper end of the spool contacts with the inside bottom of the push rod and the output pressure is left to be connected with port P.