


2. SPECIFICATIONS


1) ROBEX 210LC-7

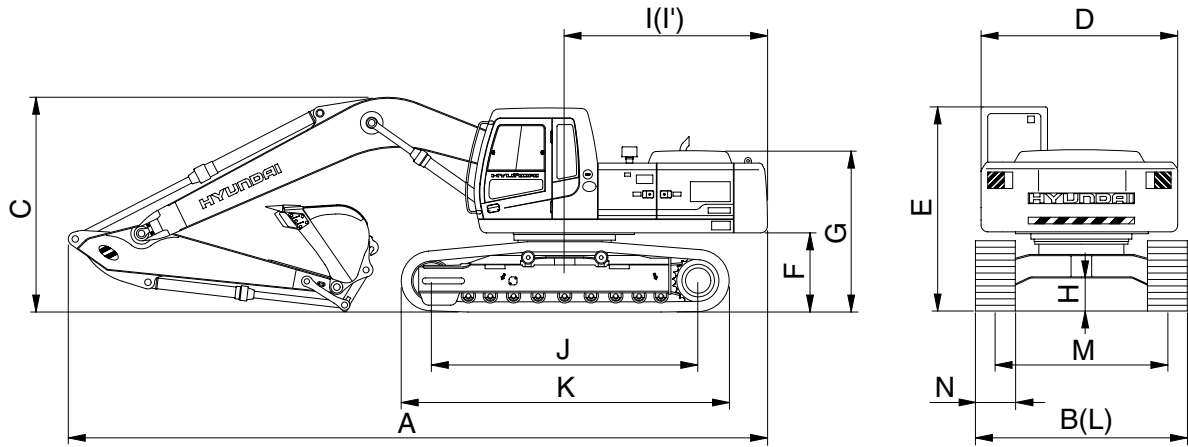

21072SP02

Description		Unit	Specification
Operating weight		kg(lb)	21700(47840)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	0.92(1.20)
Overall length	A	mm(ft-in)	9520(31' 3")
Overall width, with 600mm shoe	B		2990(9' 10")
Overall height	C		2990(9' 10")
Superstructure width	D		2700(8' 10")
Overall height of cab	E		2920(9' 7")
Ground clearance of counterweight	F		1060(3' 6")
Engine cover height	G		2320(7' 7")
Minimum ground clearance	H		480(1' 7")
Rear-end distance	I		2770(9' 1")
Rear-end swing radius	I'		2830(9' 3")
Distance between tumblers	J		3650(12' 0")
Undercarriage length	K		4440(14' 7")
Undercarriage width	L		2990(9' 10")
Track gauge	M		2390(7' 10")
Track shoe width, standard	N		600(24")
Travel speed(Low/high)		km/hr(mph)	3.4/5.3(2.1/3.3)
Swing speed		rpm	12.5
Gradeability		Degree(%)	35(70)
Ground pressure(600mm shoe)		kgf/cm ² (psi)	0.46(6.54)

2) R210LC-7 LONG REACH

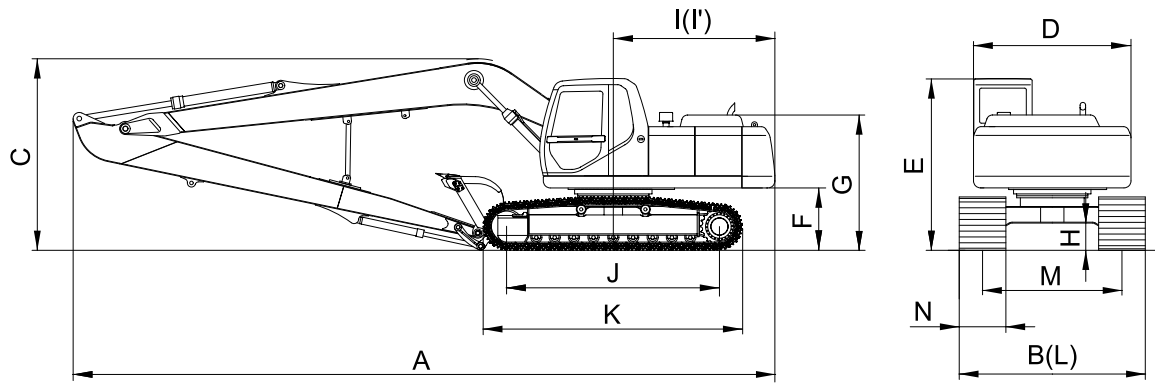

21072SP06

Description		Unit	Specification
Operating weight		kg(lb)	24360(53700)
Bucket capacity(SAE heaped), standard		m ³ (yd ³)	0.51(0.67)
Overall length	A	mm(ft-in)	12030(39' 6")
Overall width, with 800mm shoe	B		3190(10' 6")
Overall height	C		3280(10' 9")
Superstructure width	D		2700(8' 10")
Overall height of cab	E		2920(9' 7")
Ground clearance of counterweight	F		1060(3' 6")
Engine cover height	G		2320(7' 7")
Minimum ground clearance	H		480(1' 7")
Rear-end distance	I		2770(9' 1")
Rear-end swing radius	I'		2830(9' 3")
Distance between tumbler	J		3650(12' 0")
Undercarriage length	K		4440(14' 7")
Undercarriage width	L		3190(10' 6")
Track gauge	M		2390(7' 10")
Track shoe width, standard	N		800(31' 5")
Travel speed(Low/high)			km/hr(mph)
Swing speed		rpm	12.5
Gradeability		Degree(%)	35(70)
Ground pressure(800mm shoe)		kgf/cm ² (psi)	0.42(5.97)