


## 7. ELECTRICAL SYSTEM

### 1) WIRING, GAUGES


Check regularly and repair loose or malfunctioning gauges when found.

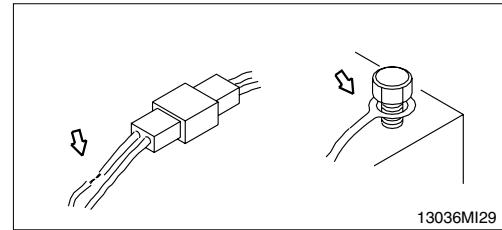

### 2) BATTERY

#### (1) Check and repair

- ① Check the electrolyte level and fill with distilled water to the prescribed level as necessary.
  - ② Wash the terminal with hot water if it is contaminated, and apply grease to the terminals after washing.
- ▲ Do not stain clothes or skin with electrolyte as it is acid.**  
**Be careful not to get the electrolyte in eyes.**  
**Wash with clean water and go to the doctor if it enters the eyes.**
- ※ Remove the fire and spark around battery.

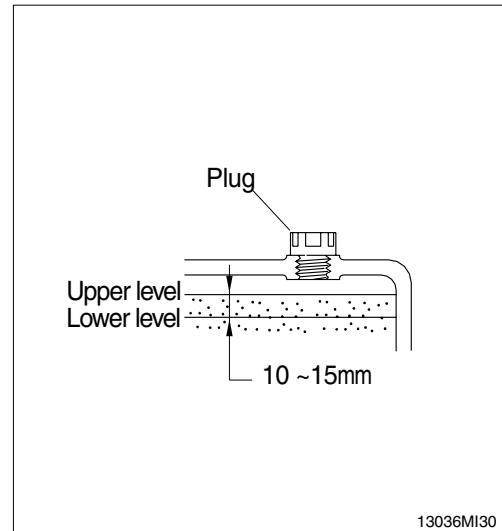


#### (2) Specific gravity of battery

Judge the charging rate of battery by the specific gravity. The specific gravity changes by the ambient temperature.


Check the charging rate by referring to the chart below.

Temperature	20°C	10°C	-10°C
Charging rate			
100%	1.26	1.27	1.28
90%	1.24	1.25	1.26
80%	1.22	1.23	1.24
75%	1.21	1.22	1.23

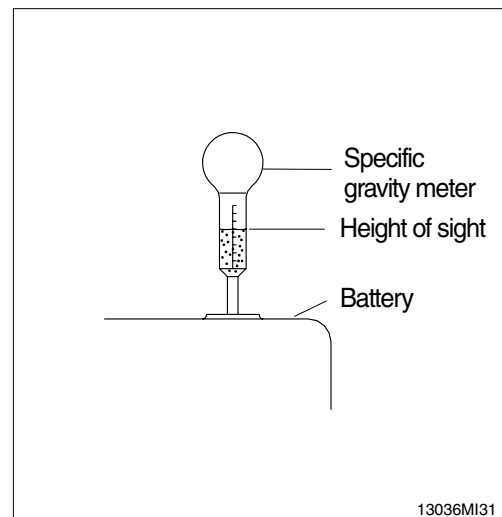

#### (3) Method of removing the battery cable

Remove the cable from the ground connection first(⊖ terminal side) and reconnect it last when reassembling.

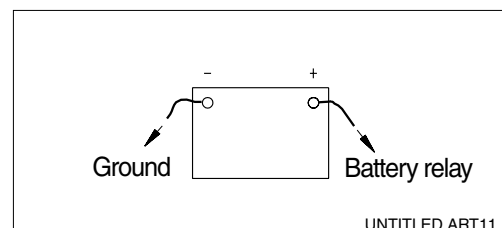

### 3) STARTING THE ENGINE WITH A BOOSTER CABLE

Keep following order when you are going to start engine using booster cable.


#### (1) Connection of booster cable

※ Use the same capacity of battery for starting.

① Connect the red terminal of booster cable to the battery (+) terminal between exhausted and new battery.

② Connect the black terminal of the booster cable to the battery (-) terminal between exhausted and new battery.


※ Keep firmly all connection, the spark will be caused when connecting finally.

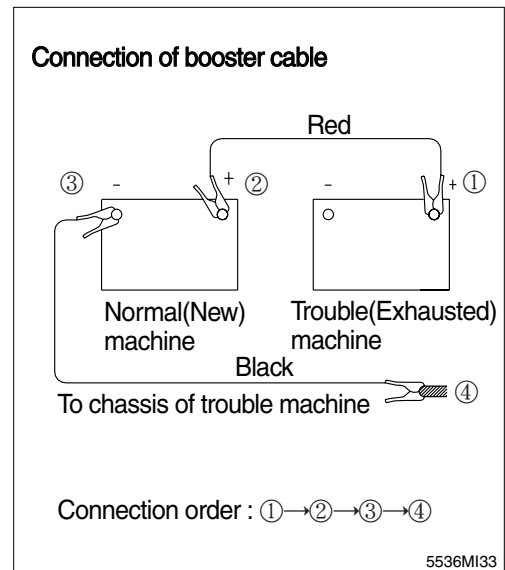

#### (2) Starting the engine

① Start engine with starting switch.

② If you can not start it by one time, restart the engine after 2 minutes.

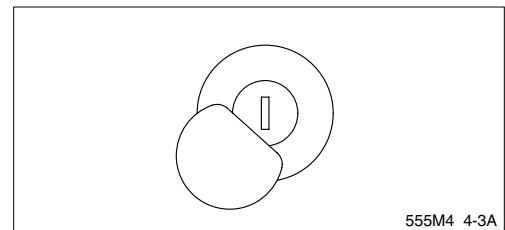

#### (3) Taking off the booster cable

① Take off the booster cable(Black).

② Take off the booster cable(Red) connected to the (+) terminal.

③ Run engine with high idle until charging the exhausted battery by alternator, fully.

▲ Explosive gas is generated while using the battery or charging it. Keep away flame and be careful not to cause the spark.


※ Charge the battery in the well ventilated place.

Place the machine on the earth or concrete.

※ Avoid charging the machine on the steel plate.

Do not connect (+) terminal and (-) terminal when connecting booster cable because it will

※ be shorted.

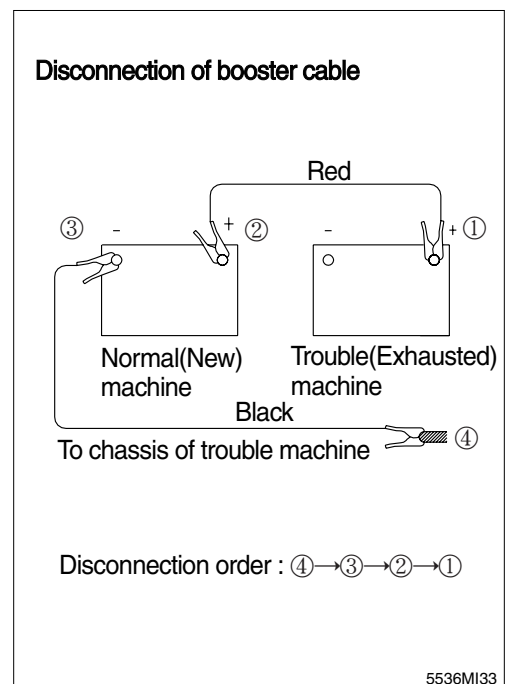

#### **(4) Welding repair**

Before start to welding, follow the below procedure.

- ① Shut off the engine and remove the starting switch.
- ② Disconnect ground cable from battery and keep away to prevent short circuit.
- ③ Disconnect wire harness from alternator.

